


Forklift Series

- ▲ Fashionable shape with meetern aesthetic feeling.
- ▲ Ergonomical design make driving more comfortable.
- ▲ Powerful and excellent performance, conform to European standard.
- ▲ New hydranlie steering system make turning more flexible, comfortable and presciseely.
- ▲ European mutifspool hydranlie values, pump and cylind make sure of prompt operating and reaction.

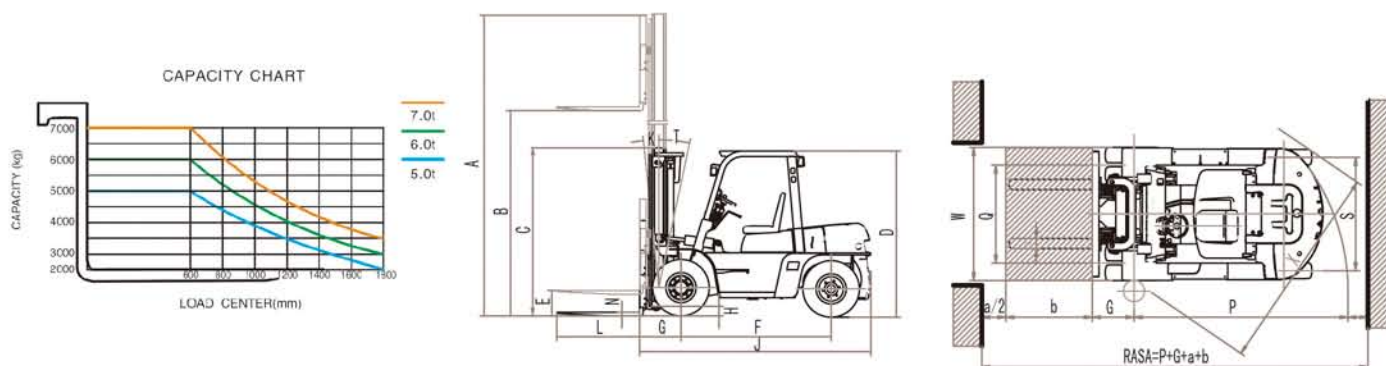

STANDARD SPECIFICATIONS

i-Lift No.		3010401	3010402	3010403
Model		CPCD50	CPCD60	CPCD70
Capacity	(kg)	5000	6000	7000
Load Center	(mm)	600	600	600
Fuel		Diesel	Diesel	Diesel
Standard Lifting Height	B (mm)	3000	3000	3000
Full Free Lifting	E (mm)	160	160	160
Fork Size	LxUxN (mm)	1220x150x60	1220x150x60	1220x150x60
Mast Tilt Angle	(°)	6/12	6/12	6/12
Min. Turning Radius	P (mm)	3300	3450	3450
Min. Right Angle Aisle Width (AST)	X (mm)	3000	3090	3090
Ground Clearance	H (mm)	150	150	150
Safeguard Height	D (mm)	2500	2500	2500
Front Overhang	G (mm)	635	635	635
Rear Overhang	J-G-F (mm)	600	720	720
Max. Drive Speed	(km/h)	24	24	24
Gradeability	(%)	20	20	20
Lifting Speed (With Load)	(mm/s)	390	360	360
Length to Face of Fork	J (mm)	3472	3592	3592
Overall Width	W (mm)	1995	1995	1995
Closed Mast Height	C (mm)	2519	2519	2519
Front Wheel		8.25-15-14PR	8.25-15-14PR	8.25-15-14PR
Rear Wheel		8.25-15-14PR	8.25-15-14PR	8.25-15-14PR
Wheelbase	F (mm)	2250	2250	2250
Tread (Front Wheel)	Q (mm)	1470	1470	1470
Tread (Rear Wheel)	S (mm)	1700	1700	1700
Overall Weight	(kg)	8000	8840	9350
Battery	(V/Ah)	2x12/105	2x12/105	2x12/105
Engine	Model	ISUZU 6BG1	ISUZU 6BG1	ISUZU 6BG1
	Rated power	(Kw/rpm)	82.3/2000	82.3/2000
	Max.torque	(Kw/rpm)	416/1400-1600	416/1400-1600
	Displacement	(CC)	6.494	6.494
Tank Capacity	(L)	140	140	140
Transmission	Original	Chinese	Chinese	Chinese
	Type	Hydraulic	Hydraulic	Hydraulic
	Shift	6/12	6/12	6/12
Operating Pressure	(Mpa)	17	17	17

Note: Various mast height available.