


Telescopic Fork Mounted Jibs TLB series

- ▲ Convert a forklift truck into a mobile crane to reach and transport long and awkward loads from inaccessible location.
- ▲ Verify load centre of forklift truck.
- ▲ Safety chain welded to boom has grab hools for anchoring jib boom to forklift truck.
- ▲ Zinc plated fork heels pin for safe forklift attachment.
- ▲ Supplied complete with one safety swived hook with bow shackle and one rigid hook.




TLB03

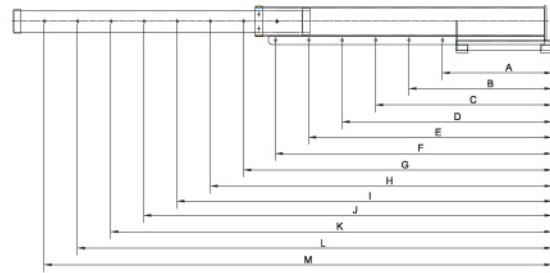


i-Lift No. / Model	1810303 / TLB03												
Positions	A	B	C	D	E	F	G	H	I	J	K	L	M
mm(in.)	755(29.7)	985(38.8)	1215(47.8)	1445(56.9)	1675(66)	1905(75)	2125(83.7)	2355(92.7)	2580(101.5)	2810(110.6)	3040(119.7)	3270(128.7)	3500(137.8)
Capacity kg(lb.)	3000(6600)	2300(5060)	1865(3707)	1570(3454)	1355(2981)	11865(4103)	1065(2343)	960(2112)	875(1925)	805(1771)	745(1639)	690(1518)	640(1408)
Fork Opening mm(in.)	464(18.3)												
Fork Pockets mm(in.)	180x60(7.1x2.4)												
Overall Size mm(in.)	2168x660x324(85.4x26x12.8)												
Packing Size mm(in.)	2180x680x444(85.8x26.8x17.5)												
Net Weight kg(lb.)	188(413.6)												




TLB01

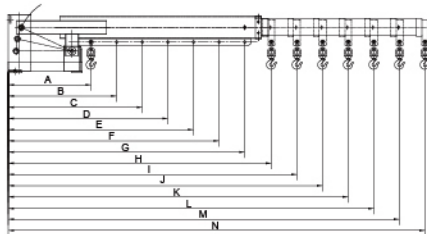

Tilt Angle: 0°

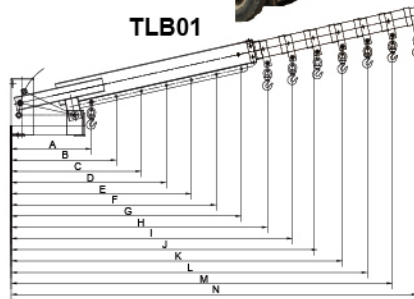

Tilt Angle: 13°

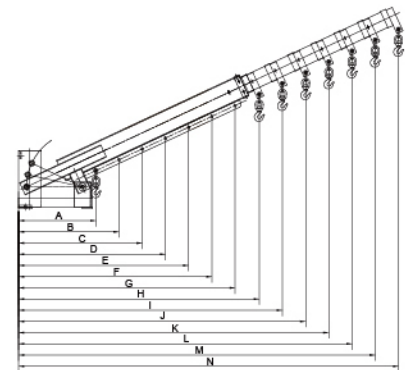

Tilt Angle: 26°

i-Lift No. / Model	1810301 / TLB01													
Positions	A	B	C	D	E	F	G	H	I	J	K	L	M	N
0° mm(in.)	740(29.1)	969(38.1)	1198(47.2)	1427(56.2)	1656(65.2)	1885(74.2)	2114(83.2)	2352(92.5)	2581(101.6)	2810(110)	3039(119)	3268(128.6)	3497(138)	3726(146.6)
0° Capacity kg(lb.)	3000(6600)	2291(5040)	1853(4077)	1556(3423)	1341(2950)	1178(2592)	1050(2310)	944(2077)	860(1892)	790(1738)	730(1606)	679(1494)	635(1397)	596(1311)
13° mm(in.)	718(28.3)	942(37)	1165(45.9)	1389(54.7)	1612(63.5)	1836(72.3)	2060(81.1)	2292(90.2)	2516(99)	2739(107.8)	2963(116.6)	3186(125.5)	3410(134)	3633(143)
13° Capacity kg(lb.)	3092(6802)	2357(5185)	1906(4193)	1598(351)	1377(3030)	1209(2660)	1078(2372)	969(2312)	882(1940)	811(1784)	749(1647)	697(1533)	651(1432)	611(1344)
26° mm(in.)	690(27.2)	897(35.3)	1105(43.5)	1312(51.6)	1520(60)	1727(68)	1935(76.2)	2150(84.6)	2358(92.8)	2566(101)	2772(109)	2980(117)	3188(125.5)	3395(133.6)
26° Capacity kg(lb.)	3217(7077)	2475(5445)	2009(4420)	1692(3722)	1460(3212)	1285(2827)	1147(2523)	1032(2270)	941(2070)	865(1903)	801(1762)	745(1639)	696(1531)	654(1439)
Fork Opening mm(in.)	346(13.6)													
Fork Pockets mm(in.)	180x74(7.1x2.9)													
Overall Size mm(in.)	2322x542x512(91.4x21.3x20.2)													
Packing Size mm(in.)	2340x560x630(92.1x22x24.8)													
Net Weight kg(lb.)	240(528)													