

High Lift Scissor Truck HB series

One of the best selling high lift scissor truck in the world !

▲ **World class quality and performance.**

▲ **Single stage cylinder.**

No decrease of capacity.

No risk of leakage.

No dangerous dropping of second stage cylinder.

▲ **Ergonomic design handle.**

Simple and comfortable operation.

▲ **Improved safety.**

Automatic activation of self-adjusting stabilizers when lifting loads higher than 400mm for maximum stability and optimal braking.

▲ **HB1056M/1068M-Manual.**

Quick-lift function doubles the lifting speed when lifting loads less than 250kg.

▲ **HB1056E/EN, HB1068E/EN-Electric.**

▲ **Easy handling**

The compact structure with the battery and power unit positioned between body and lifting cylinder resulting in a low centre of gravity and excellent maneuverability.

▲ **Flexibility**

Can work manually when the battery electric unit works manually as well when battery is being charged.



▲ **Charger**

10A/12V separate, or 6A/12V Built-in.

▲ **Reliable**

HPI power unit made in France.


▲ **Conforms to EN1757-4 and EN1175.**

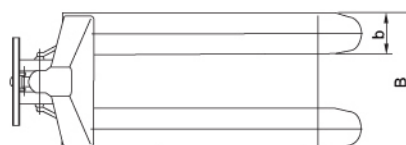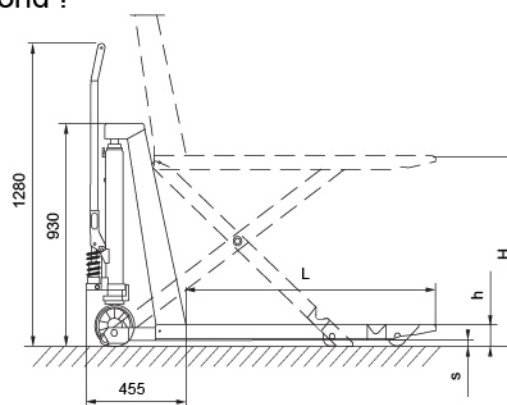

HB1056M



HB1056EN



Built-in charger

i-lift No.		1410701	1410702	1410703	1410704	1410705	1410706	1411101	1411102	1411103	1411104	1411105	1411106
Model		HB1056M	HB1068M	HB1056E	HB1068E	HB1056EN	HB1068EN	HB1556M	HB1568M	HB1556E	HB1568E	HB1556EN	HB1568EN
Type		Manual		Electric		Electric (built in charger)		Manual		Electric		Electric (built in charger)	
Capacity	kg(lb.)	1000(2200)						1500(3300)					
Max. Fork Height	H (mm)(in.)	800(31.5)											
Min. Fork Height	h (mm)(in.)	85 ± 2 (3.3 ± 0.1)											
Fork Width	B (mm)(in.)	560(22)	680(26.8)	560(22)	680(26.8)	560(22)	680(26.8)	560(22)	680(26.8)	560(22)	680(26.8)	560(22)	680(26.8)
Fork Length	L (mm)(in.)	1190(46.9)						1170(46)					
Ground Clearance	s (mm)(in.)	20(0.8)											
Front Load Roller	mm(in.)	Φ75x75(3x3)											
Steering Wheel	mm(in.)	Φ180x50(7x2)											
Pump Strokes to Max. Height without / with Rated Load		28/62		—				28/62		—			
Lifting Time, without /with Rated Load	(sec)	—		11/19				—		11/25			
Battery	(Ah/V)	—		70/12				—		70/12			
Battery Charger		—		Separate 10A/12V		Built-in 6A/12V		—		Separate 10A/12V		Built-in 6A/12V	
Net Weight (without Battery)	kg(lb.)	128(281.6)	133(292.6)	158(347.6)	163(358.6)	159(349.8)	164(360.8)	143(314.6)	148(325.6)	170(374)	175(385)	171(376.2)	176(387.2)