





Manual Hoist HCB series

Best selling in USA

- Compact design, all steel construction, light handpull.
- Heat treated low-wear, corrosive resistant chain.
- Drop-forged hooks designed to bend slowly to warn of overloads.
- **Conforms to CE safety standard.**

IMPORTANT:

Before installation, see maintenance and operation manual for additional warnings and precautions. Do not use in explosive environment.

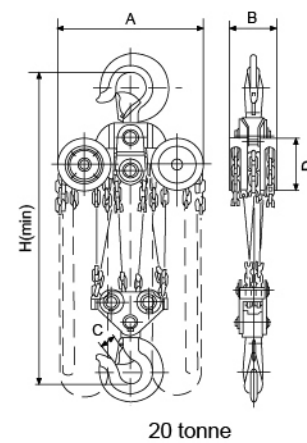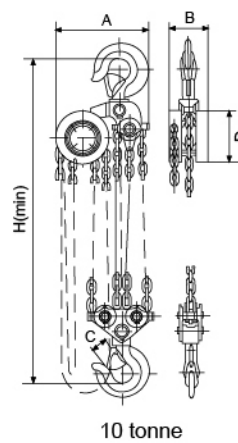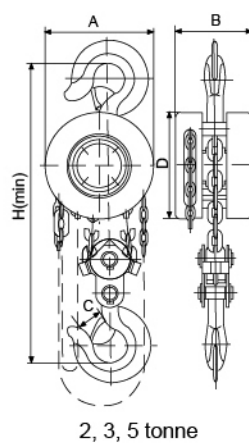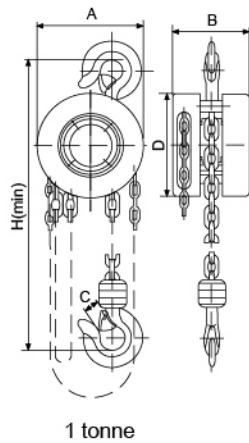

i-Lift No.		2110602		2110604		2110605		2110606		2110607		2110608			
Model		HCB10		HCB20		HCB30		HCB50		HCB100		HCB200			
Rated Capacity		kg(lb.)		1000(2200)		2000(4400)		3000(6600)		5000(11000)		10000(22000)		20000(44000)	
Standard Lifting Height		mm(in.)		2500/3000(100/120)				3000/5000(120/200)							
Test Load		(KN)		12.5		25		37.5		62.5		125		250	
Effort to Rated Capacity		(N)		310		320		360		400		430		430	
No. of Load Chain Falls		1		2		2		2		4		8			
Min. Distance between Hooks H		mm(in.)		300(12)		380(15)		470(18.5)		600(23.6)		730(28.7)		1000(40)	
Diameter of Load Chain		mm(in.)		Φ6x18 (0.2x0.7)		Φ6x18 (0.2x0.7)		Φ8x24 (0.3x0.9)		Φ10x30 (0.4x1.2)					
Dimensions	A mm(in.)	142(5.6)		142(5.6)		178(6.8)		210(8.3)		358(14.1)		580(22.8)			
	B mm(in.)	130(5.2)		130(5.2)		139(5.6)		162(6.4)		162(6.4)		189(7.4)			
	C mm(in.)	22(0.9)		26(1)		32(1.2)		44(1.7)		50(2)		70(2.7)			
	D mm(in.)	142(5.6)		142(5.6)		178(6.8)		210(8.3)		358(14.1)		580(22.8)			
Net Weight		kg(lb.)		9.2(20.2)	10(22)	12(26.4)	14(30.8)	20.2(44.4)	22.7(50)	32(70.4)	35(77)	65(143)	68(150)	148(325.6)	155(341)
Gross Weight		kg(lb.)		9.6(21)	10.4(23)	13.1(28.8)	14.5(31.9)	20.8(45.8)	23.3(51.3)	33(72.6)	36(79.2)	67(147.4)	80(176)	150(330)	180(396)
Extra Weight Per Meter of Extra Lift		(pcs)		1.65		2.5		3.7		5.2		9.6		19.2	

Note: In addition to the standard lift height, we accept up to 12m lifting height.