


Mini-Electric Hoist MB series

- Conforms to latest European Standard, certified for CE/GS designed with latest European technology.
- Suitable for lifting or unloading goods in shops, restaurant, industry assembly lines and food industry.
- Also a useful tool to lifting materials and different goods in house or apartment.
- With urgent stop switch and reinforced breaking switch with position limit, protection class up to IP54, with thermal prevention device.

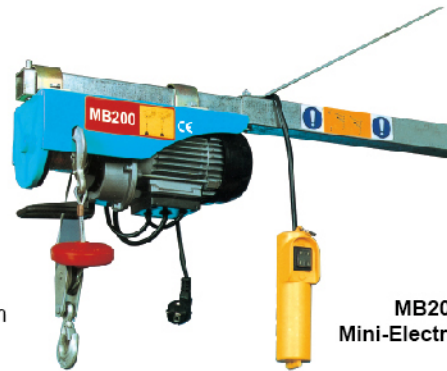


MB200
Mini-Electric Hoist

i-Lift No.	2210801		2210804		2210805		2210806	
Model	MB100		MB200		MB250		MB300	
No. of wire	Single	Double	Single	Double	Single	Double	Single	Double
Use of Hook Rated Voltage (V)	220/230							
Input Power (W)	180		450		500		550	
Lifting Cap. kg(lb.)	50(110)	100(220)	100(220)	200(440)	125(275)	250(550)	150(330)	300(660)
Lifting Speed mm(in.)/min	8000 (315)	4000 (157)	8000 (315)	4000 (157)	8000 (315)	4000 (157)	8000 (315)	4000 (157)
Lifting Height mm(in.)	8000 (315)	4000 (157)	12000 (472.4)	6000 (236.2)	12000 (472.4)	6000 (236.2)	12000 (472.4)	6000 (236.2)
G.W./N.W. kg(lb.)/2pcs	21/20(46.2/44)						22/21(48.4/46.2)	

i-Lift No.	2210808		2210809		2210810		2210813		2210814	
Model	MB400		MB500		MB600		MB800		MB1000	
No. of wire	Single	Double	Single	Double	Single	Double	Single	Double	Single	Double
Use of Hook Rated Voltage (V)	220/230									
Input Power (W)	750		900		1050		1350		1600	
Lifting Cap. kg(lb.)	200(440)	400(880)	250(550)	500(1100)	300(660)	600(1320)	400(880)	800(1760)	500(1100)	999(2197.8)
Lifting Speed mm(in.)/min	8000 (315)	4000 (160)	8000 (315)	4000 (160)	8000 (315)	4000 (160)	8000 (315)	4000 (160)	8000 (315)	4000 (160)
Lifting Height mm(in.)	12000 (472.4)	6000 (236.2)	12000 (472.4)	6000 (236.2)	12000 (472.4)	6000 (236.2)	12000 (472.4)	6000 (236.2)	12000 (472.4)	6000 (236.2)
G.W./N.W. kg(lb.)/2pcs	33/31(72.6/68.2)		34/32(74.8/70.4)		36/34(79.2/74.8)		41/39.5(90.2/86.9)		68/64(149.6/140.8)	


Rotary Hoist Frame MF series

- Conforms to CE safety standard.

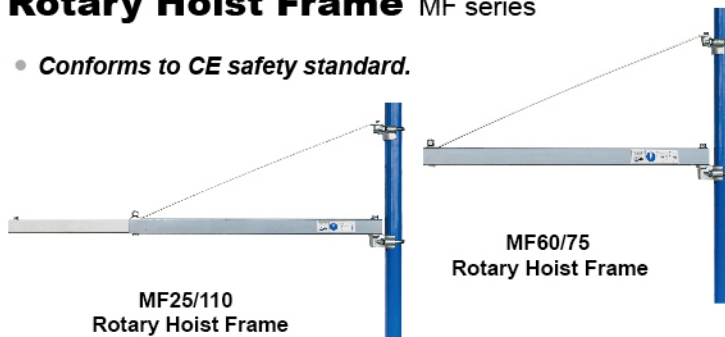

MF25/110
Rotary Hoist Frame

MF60/75
Rotary Hoist Frame

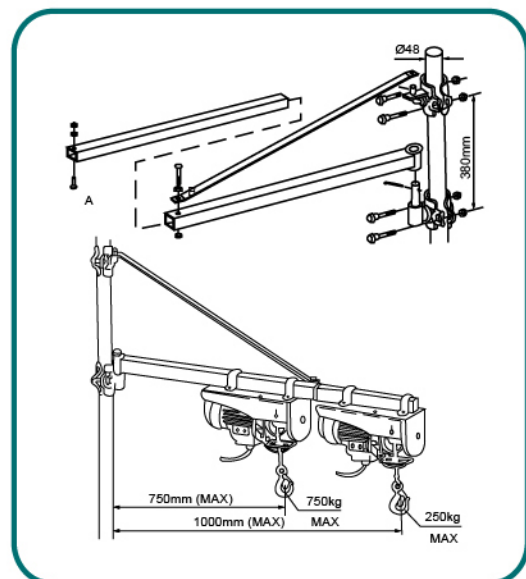

i-Lift No.	2210901	2210902
Model	MF25/110	MF60/75
Capacity kg(lb.)	250(550)	600(1320)
Max. Length mm(in.)	1100(44)	750(29.5)
G.W./N.W. kg(lb.)	49/48(105.6/107.8)	38/37(83.6/81.4)