



Electric Trolley ET series

3-Phase 380V, 50Hz


- Pushbutton imported from Europe and protected to IP65, with voltage: 48V, special voltage is available on request.
- **Conforms to CE safety standard.**

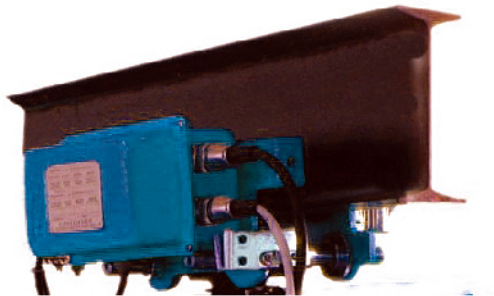

ET20

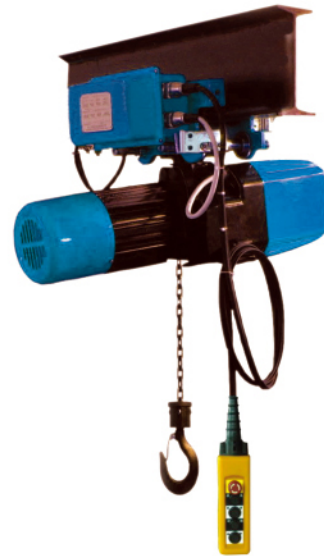

i-Lift No.		2211201	2211202
Model		ET10	ET20
Capacity	kg(lb.)	1000(2200)	2000
Travelling speed	mm(in.)/min	5000/10000/146000(200/400/574.8)	
Motor Power	(kw)	0.18	
Working Duty		S2, 30min	
Beam Flange Width	mm(in.)	64-152(2.5-6)	
Min.radius of curve	mm(in.)	1000(40)	
Dimensions	C mm(in.)	662(26.1)	
	A mm(in.)	406(16)	
	E mm(in.)	205(8)	
	F mm(in.)	467(18.4)	

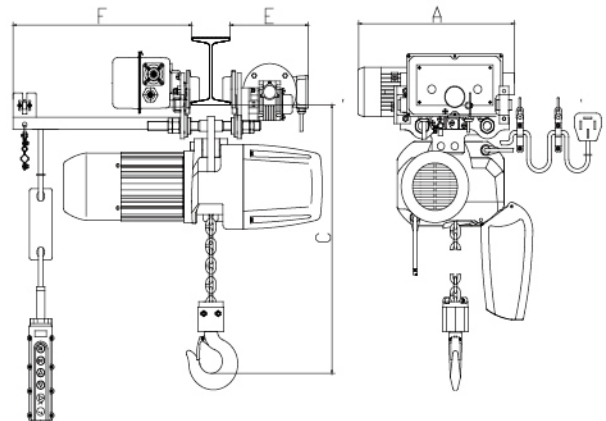

Mini Electric Hoist with Moving Trolley KX series

- Combines the fine quality features of a mini electric hoist with a motorized trolley that positions loads quickly and exactly.
- Trait: with urgent stop switch and reinforced breaking switch with position limit. Protection class up to IP54, with thermal prevention device.
- **Conforms to CE safety standard.**



KX-500C

i-Lift No.	2211301	2211302	2211303	2211304	2211305	2211306	2211307	2211308	2211309	2211310
Model	KX-200C	KX-250C	KX-300C	KX-400C	KX-500C	KX-600C	KX-700C	KX-800C	KX-1000C	KX-1200C
Rated Capacity kg(lb.) Single/Double hook	100/200 (220/440)	125/250 (275/550)	150/300 (330/660)	200/400 (440/880)	250/500 (550/1100)	300/600 (660/1320)	350/700 (770/1540)	400/800 (880/1760)	500/1000 (1100/2200)	600/1200 (1320/2640)
Lifting Height mm(in.) Single/Double hook	12000/6000(480/240)									
Load of moving Vehicle kg(lb.)	500(1100)						1000(2200)			
Speed of moving Vehicle mm(in.)/min	13000(520)									
G.W./N.W. kg(lb.)	31/29(68.2/63.8)				35/33(77/72.6)		37/35 (81.4/77)	39/37(85.8/81.4)		56/54 (123.2/118)