

Mini Electric Hoist HXS series

FEATURES

Light weight & compact design allow convenient mounting,
When rope touches the limit arm, stopped automatically.
Dynamic brake designs for both static and dynamic loading.
It operates on household power source.
Plug-in cords allow portability with easy.
360° universal joint saddle hook with safety latch.

APPLICATIONS

Mini Winch with built-in safety devices feature easily controls
lifting for a wide range of 20 metres. 30, 40, 50 meters
are available as option.
Applicable for warehouses, storage areas, factories, house
areas, constuction sites, job sites and plumbings.

- **Trait:** with urgent stop switch and reinforced breaking
switch with position limit, Protection class up to IP45,
with thermal prevention device

- **Conforms to CE safety standard.**

STANDARD ACCESSORIES



Standard versions



SWITCH CORD
1.25mmx6Cx10M



1.25mmx6Cx10M



POWER CORD
2.0mmx3Cx5M




SADDLE HOOK
CHW-0032, CHW-0033



MOUNTINGS

- (A) Hang Type
Mount it on firm and stable bar.
(B) Arm Type
Mount it on an optional crane.

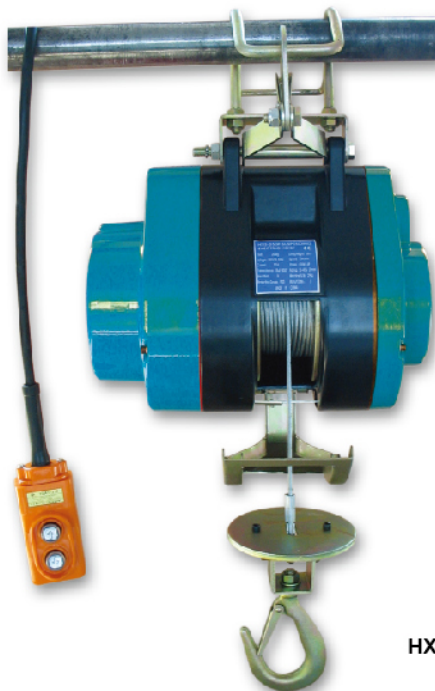

HXS-200F

i-Lift No.	2211401	2211402	2211403	2211404
Model	HXS-100F	HXS-150F	HXS-200F	HXS-250F
Rated Capacity kg(lb.)	100(220)	150(330)	200(440)	250(550)
Rated Volt (V;50/60Hz)	220	230	240	110
Input Power (W)	580	780	1050	1200
Cable Diameter mm(in.)	Φ3.8(0.1)		Φ5.1(0.2)	
Lifting Speed mm(in.)/min	15000(600)		12000(480)	
G.W./N.W. kg(lb.)	30/28(66/61.6)		32/30(70.4/66)	

The load rated are based on the last layer of wire rope