

Push Trolley PT series

Professional class


- Adapts to wide range of beam adjustment by thread.
- Versatile trolley for use with any hook suspended hoist.
- **Conforms to CE safety standard.**

Warning:

The equipment shown is only intended for industrial use. Should not be used to lift, support, transport people, or to suspend loads over people.



PT20-A

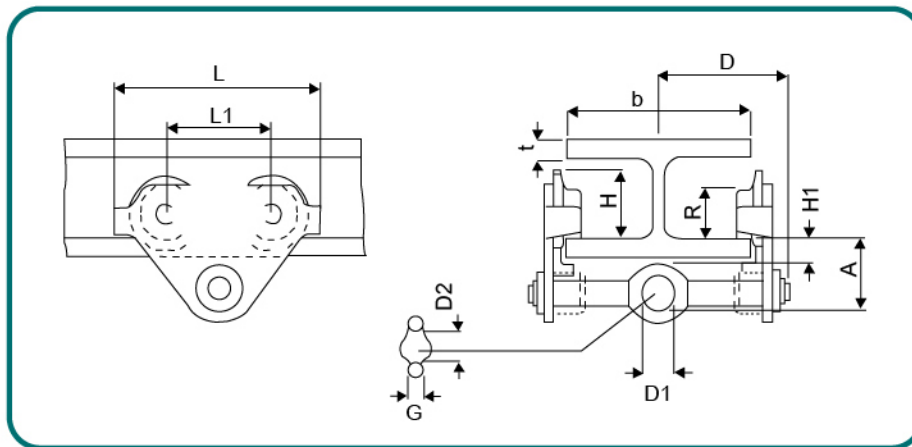

i-Lift No.	2211501	2211502	2211503	2211504	2211505	2211506	2211507	2211508	2211509	2211510
Model	PT05-A	PT05-B	PT10-A	PT10-B	PT20-A	PT20-B	PT30-A	PT30-B	PT50-A	PT50-B
Capacity	500(1100)		1000(2200)		2000(4400)		3000(6600)		5000(11000)	
Beam Flange Width	64-220(2.5-8.6)		64-220(2.5-8.6)		88-220(3.5-8.6)		102-220(4-8.6)		114-220(4.5-8.6)	
Beam Flange Thickness	25(1)		25(1)		25(1)		25(1)		25(1)	
A	90(3.6)		85(3.2)		98(3.9)		113(4.5)		132(5.2)	
G	16(0.6)		18(0.6)		22(0.8)		28(1.1)		33(1.3)	
D1	25(1)		30(1.2)		34(1.3)		46(1.8)		57(2.2)	
D2	29(1.2)		34(1.4)		46(1.8)		55(2.2)		67(2.6)	
H	67.5(2.7)		72(2.8)		88.5(3.5)		105(4.1)		125(4.9)	
H1	30.5(1.2)	45.5(1.8)	30.5(1.2)	45.5(1.8)	30.5(1.2)	45.5(1.8)	30(1.2)	45(1.8)	30(1.2)	45(1.8)
L	225(8.8)		245(9.6)		305(12)		345(13.6)		410(16.1)	
L1	112(4.4)		120(4.7)		138(5.4)		156(6.1)		177(7)	
R	57(2.3)		60(2.4)		75(3)		90(3.5)		110(4.3)	
D	150(6)		150(6)		155(6.1)		160(6)		165(6.5)	
Net Weight	5.6(12.3)		10(22)		16(35.2)		32(70.4)		48(105.6)	