



Trolley Clamp TC series

- The easy installation to any beam makes it suitable for fixing to any moving hoist, pulleys and loads.
- It can be adjusted quickly to the beam width by turning the main spindle.
- Safety is ensured by the special locking lever.
- The spindle and snap-pin stops are galvanized to protect against corrosion.
- **Conforms to CE safety standard.**



TC20A

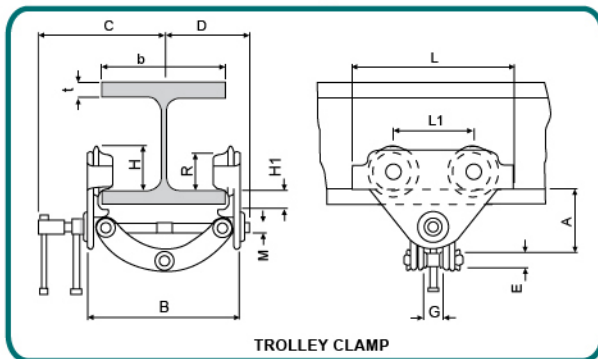


TROLLEY CLAMP

i-Lift No.	2211601	2211602	2211603	2211604	2211605
Model	TC10A	TC20A	TC20B	TC30A	TC30B
Capacity	kg(lb.)	1000(2200)	2000(4400)	3000(6600)	
Flange Width	b mm(in.)	61-151 (2.4-6)	74-200 (3-8)	199-300 (8-12)	75-200 (3-8)
A		81-108 (3.2-4.3)	89-154 (3.5-6)	135-190 (5.3-7.5)	128-171 (5-6.7)
G		26(1)	42(1.6)		50(2)
E		22(0.8)	20(0.7)		22(0.8)
H1		20(0.7)	30(1.2)		30.5(1.2)
H		53(2.1)	71.5(2.8)		95.5(3.7)
L	mm(in.)	160(6.3)	260(10.2)		310(12.2)
L1		75(3)	130(5.1)		150(6)
M		M12	M18		M24
R		46(1.8)	60(2.4)		80(3.1)
C		153(6)	205(8)	255(10)	220(8.7)
D		105(4.1)	139(5.5)	189(7.4)	155(6)
t max		15(0.6)		25(1)	
Net Weight	kg(lb.)	2.5(5.5)	9.9(21.8)	10.3(22.7)	17.5(38.5)
					19.5(43)


Plain Trolleys 0.5-10ton HMT series

Professional class

- Double sealed ball bearings.
- Built-in bumper guards.
- Adjustable to fit various sizes of flange and I-beams.
- Use on straight or curved track.
- Can be installed or removed at any point along the track.
- **Conforms to CE safety standard.**
- **Conforms to ANSI/ASME safety standard.**



HMT10

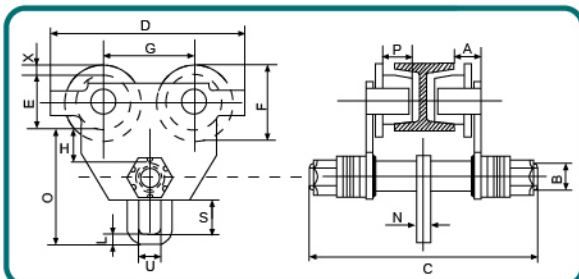

i-Lift No.	2211701	2211702	2211703	2211704	2211705	2211706
Model	HMT05	HMT10	HMT20	HMT30	HMT50	HMT100
Capacity	kg(lb.)	500(1100)	1000(2200)	2000(4400)	3000(6600)	5000(11000)
Beam Flange Width	b mm(in.)	64-140(2.5-5.5)	76-165 (3-6.5)	76-203 (3-8)	88-203 (3.5-8)	125-203 (5-8)
Dimensions	mm(in.)					
O	128(5)	143(5.6)	172(6.7)	212(8.3)	254(10)	320(12.6)
A	22(0.8)	25(1)	27(1.1)	31(1.2)	36(1.4)	46(1.8)
B ø	24(0.9)	30(1.2)	36(1.4)	42(1.6)	48(1.9)	60(2.4)
C	230(9)	254(10)	294(11.6)	344(13.5)	360(14.2)	403(16.1)
D	212(8.3)	255(10)	302(12)	344(13.5)	378(15)	445(17.5)
E ø	60(2.4)	75(3)	90(3.5)	110(4.4)	122(4.8)	151(6)
F	82(3.2)	102(4)	122(4.8)	142(5.6)	156(6.1)	188(7.4)
G	102(4)	118(4.6)	137(5.4)	157(6.2)	172(6.8)	200(8)
H	28(1.1)	25(1)	27(1.1)	32(1.2)	34(1.3)	35(1.4)
T ø	44(1.7)	50(2)	60(2.4)	78(3)	90(3.5)	94(3.7)
S	36(1.4)	48(1.9)	58(2.3)	74.5(2.9)	97(3.8)	114(4.5)
L	15(0.6)	15(0.6)	20(0.7)	26(1)	35(1.4)	45(1.8)
X	12(0.5)	13.5(0.5)	16(0.6)	16(0.6)	17(0.7)	18(0.7)
P	26(1)	28(1.1)	34(1.3)	38(1.5)	44(1.7)	48(1.9)
N	10(0.4)	12(0.5)	14(0.6)	16(0.6)	20(0.8)	25(1)
U	24(0.9)	30.5(1.2)	36(1.4)	45(1.8)	60(2.4)	82(3.2)
Net Weight	kg(lb.)	7(15.4)	12(26.4)	22(48.4)	30(66)	55(121)
						93(204.6)