


Plain Trolleys 0.5-10ton HMT-R series

Professional class

- Double sealed ball bearings.
- Built-in bumper guards.
- Adjustable to fit various sizes of flange and I-beams.
- Use on straight or curved track.
- Can be installed or removed at any point along the track.
- **Conforms to CE safety standard.**
- **Conforms to ANSI/ASME safety standard.**



HMT10R

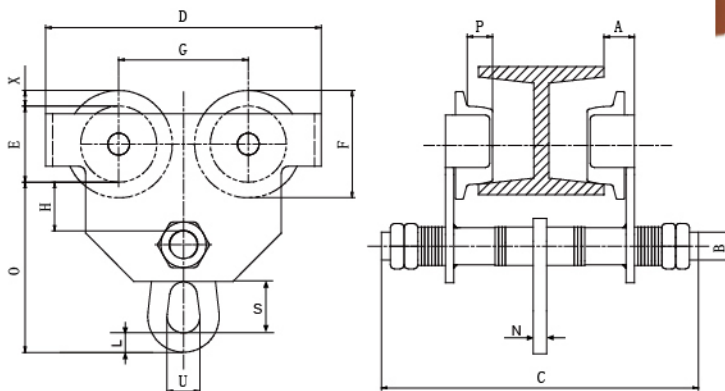

i-Lift No.		2212701	2212702	2212703	2212704	2212705	2212706
Model		HMT05R	HMT10R	HMT20R	HMT30R	HMT50R	HMT100R
Capacity kg (lbs)		500(1100)	1000(2200)	2000(4400)	3000(6600)	5000(11000)	10000(22000)
Beam Flange Width b mm (inch)		68-126 (2.6-4.9)	64-140 (2.5-5.5)	76-165(2.9-6.4)	76-203 (2.9-7.9)	88-203(3.4-7.9)	125-203 (4.9-7.9)
Dimensions mm (inch)	O	108 (4.2)	115 (4.5)	130 (5.1)	164 (6.4)	177 (6.9)	237 (9.3)
	A	22 (0.8)	25 (0.9)	27 (1.0)	31 (1.2)	36 (1.4)	46 (1.8)
	B	20 (0.7)	24 (0.9)	27 (1.0)	32 (1.2)	38 (1.4)	60 (2.3)
	C	208 (8.1)	242 (9.5)	280 (11.0)	300 (11.8)	316 (12.4)	345 (13.5)
	D	196 (7.7)	236 (9.2)	273 (10.7)	320 (12.5)	366 (14.4)	460 (18.1)
	E	57 (2.2)	66 (2.5)	75 (2.9)	96 (3.7)	112 (4.4)	150 (5.9)
	F	78 (3.0)	90 (3.5)	105 (4.1)	130 (5.1)	150 (5.9)	189 (7.4)
	G	94 (3.7)	120 (4.7)	136 (5.3)	150 (5.9)	169 (6.6)	198 (7.7)
	H	24 (0.9)	20 (0.7)	21 (0.8)	31 (1.2)	54 (2.1)	40 (1.5)
	X	10.5 (0.4)	12 (0.4)	15 (0.5)	17 (0.6)	19 (0.7)	19.5 (0.7)
	P	19.5 (0.7)	22 (0.8)	24.4 (0.9)	30 (1.1)	45 (1.7)	45 (1.7)
	U	24 (0.9)	28 (1.1)	34 (1.3)	35 (1.3)	40 (1.5)	78 (3.0)
	L	10 (0.4)	16 (0.6)	17 (0.6)	21.5 (1)	22 (1)	27 (1.3)
	N	10 (0.4)	12 (0.4)	16 (0.6)	16 (0.6)	20 (0.9)	30 (1.2)
	S	37 (1.4)	40.5 (1.6)	44 (1.7)	57.5 (2.2)	65 (2.5)	91 (3.6)
Net Weight kg (lbs)		7 (15.4)	8.7 (19.14)	10.4 (22.88)	24 (52.8)	36 (79.2)	83 (182.6)