


Geared Trolley SG series

Professional class

- Very easy to adjust the width to fit different beam by thread.
- Cast iron universal tread wheels for use on flat or tapered flange beams.
- Sealed "Lube for Life" ball bearings.
- Wheel adjustments will fit most I.S.W and I-beams or patented track.
- Effective for precise spotting jobs.
- Equipped with 3m drop chain.
- **Conforms to CE safety standard.**

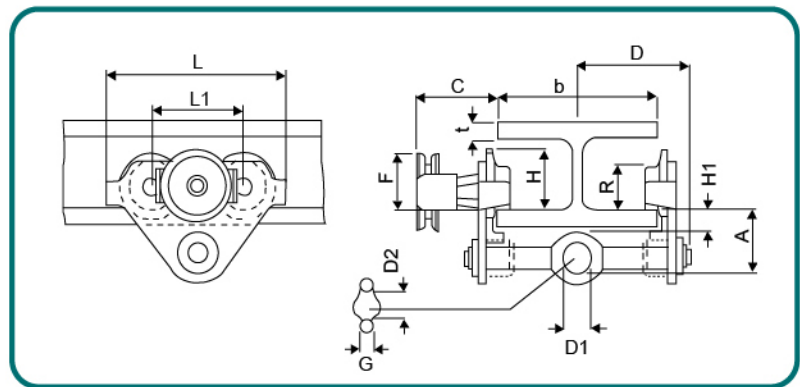

SG20A

i-Lift No.	2211801	2211802	2211803	2211804	2211805	2211806	2211807	2211808	2211809	2211810
Model	SG05A	SG05B	SG10A	SG10B	SG20A	SG20B	SG30A	SG30B	SG50A	SG50B
Capacity kg(lb.)	500(1100)		1000(2200)		2000(4400)		3000(6600)		5000(11000)	
Beam Flange Width b mm(in.)	64-220(2.5-8.6)		64-220(2.5-8.6)		88-220(3.5-8.6)		102-220(4-8.6)		114-220(4.5-8.6)	
Beam Flange Thickness t mm(in.)	25(1)		25(1)		25(1)		25(1)		25(1)	
A	90(3.5)		85(3.3)		98(3.9)		113(4.5)		132(5.2)	
C	80(3.1)		82(3.2)		85(3.3)		88(3.4)		92(3.6)	
G	17(0.6)		18(0.7)		22(0.8)		28(1.1)		33(1.3)	
D1	25(1)		30(1.2)		34(1.3)		46(1.8)		57(2.2)	
D2	29(1.2)		34(1.4)		46(1.8)		55(2.2)		67(2.6)	
F	55(2.2)		65(3)		100(4)		114(4.5)		168(6.6)	
H	67.5(2.6)		72(2.8)		88.5(3.5)		105(4.1)		125.5(4.9)	
H1	30.5(1.2)	45.5(1.8)	30.5(1.2)	45.5(1.8)	30.5(1.2)	45.5(1.8)	30(1.2)	45(1.8)	30(1.2)	45(1.8)
L	225(8.9)		245(9.6)		305(12)		345(13.6)		410(16.1)	
L1	112(4.4)		120(4.7)		138(5.4)		156(6.1)		177(7)	
R	57(2.2)		60(2.4)		75(2.9)		90(3.5)		110(4.3)	
D	150(6)		150(6)		155(6.1)		160(6)		165(6.5)	
Net Weight kg(lb.)	9.3(20.5)		13(28.6)		20.5(45)		30(66)		45(99)	