


Beam clamp BC series

- Capacity 1 to 10 ton.
- Clamp jaw is designed to reduce flange stress by distributing load away from I-beam flange edge.
- Can be mounted easily with threaded handle.
- Fits a wide range of flange widths and beams.
- Suspension bar provides lower headroom.
- Customer's specification or OEM is available.
- **Conforms to CE safety standard.**
- **Conforms to ANSI/ASME safety standard.**

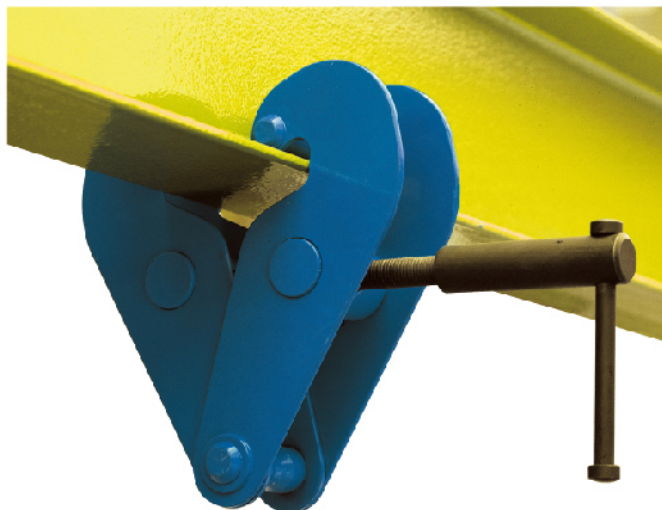

BC20

i-Lift No.		2212001	2212002	2212003	2212004	2212005	
Model		BC10	BC20	BC30	BC50	BC100	
Capacity	kg(lb.)	1000(2200)	2000(4400)	3000(6600)	5000(11000)	10000(22000)	
Beam Flange Width	mm(in.)	75-230 (3-9)		80-322 (3.1-12.6)	90-322 (3.5-12.6)		
Amin	mm(in.)	116(4.5)		180(7)		176(6.9)	
Amax		151(5)		225(8.8)		221(8.7)	
B1		78(3)		80(3.1)	90(3.5)		
B2		247(9.7)		322(12.7)			
A1		186(7.3)		232(9.1)	242(9.5)	268(10.5)	
A2		350(13.8)		455(18)	445(17.5)	480(18.9)	
b1		75(3)		80(3.1)	90(3.5)		
b2		230(9)		322(12.7)	312(12.3)	322(12.7)	
C		50(2)		70(2.8)			
D		4(0.1)		6(0.2)	8(0.3)	10(0.4)	12(0.5)
E		215(8.5)		255(10)		275(10.8)	
F1		34(1.3)		35(1.3)			
F2		17(0.7)		18(0.7)	21(0.8)		20(0.8)
G1		83(3.3)		121(4.7)	117(4.6)	111(4.3)	
G2		45(1.8)		76(3)		67(2.6)	
H		20(0.8)		22(0.8)	28(1.1)	38(1.5)	
J1		14(0.6)		30(1.2)		34(1.3)	
J2		21(0.8)		34(1.3)		35(1.3)	
K1		48(1.9)		50(2)	60(2.4)		
K2		31(1.2)		32(1.2)	40(1.6)	42(1.7)	40(1.6)
L	84(3.3)		94(3.7)	122(4.8)	129(5)	146(5.7)	
Net Weight	kg(lb.)	3.9(8.6)	4.7(10)	9.2(20)	11(24.2)	17.5(38.5)	

