
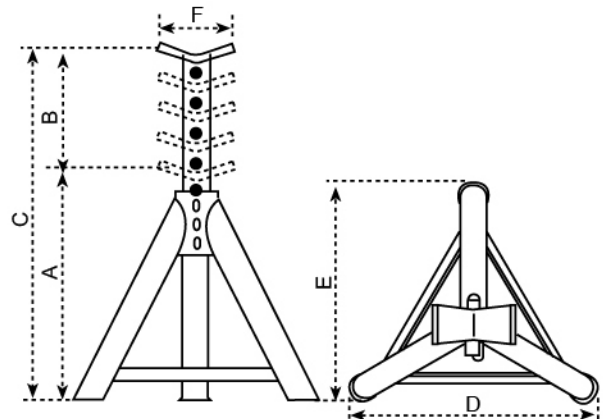


Axle Stand SN series

For all professional applications !

- Capacity from 1500kg to 16000kg.
- Heavy duty structure, high stability and long life.
- According to safety regulations, every vehicle must be supported by stands.

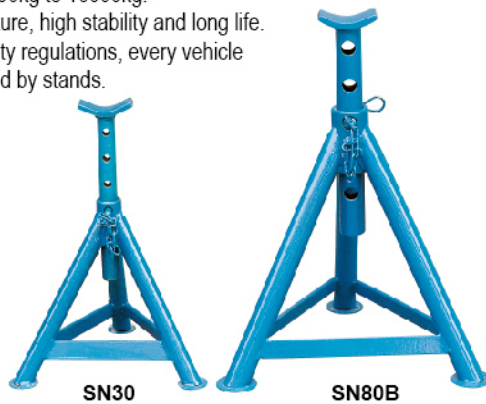

i-Lift No.	2310401	2310402	2310403	2310404	2310405	2310406	2310407	2310408	2310409
Model	SN15A	SN15B	SN30	SN50	SN80A	SN80B	SN160A	SN160B	SN160C
Capacity	kg(lb.)	1500(3300)	1500(3300)	3000(6600)	5000(11000)	8000(17600)	8000(17600)	16000(35200)	16000(35200)
Min. Height	A mm(in.)	260(10.2)	420(16.5)	320(12.6)	375(14.8)	380(15)	580(22.8)	295(11.6)	435(17.1)
Max. Height	B mm(in.)	140(5.5)	240(9.4)	210(8.3)	200(8)	220(8.7)	385(15.2)	140(5.5)	280(11)
Fully Extended	C mm(in.)	400(15.7)	660(26)	530(20.7)	575(22.6)	600(23.6)	965(38)	435(17.1)	715(28.1)
Pitch	mm(in.)	38(1.5)	65(2.6)	40(1.7)	50(2)	55(2.1)	75(3)	70(2.8)	70(2.8)
Top	F mm(in.)	70(2.8)	70(2.8)	70(2.8)	70(2.8)	125(5)	125(5)	130(6)	130(6)
Distance of Legs	D mm(in.)	270(10.6)	415(16.3)	335(13.2)	385(15.2)	400(15.7)	596(23.5)	321(12.6)	480(18.9)
Distance of Legs	E mm(in.)	240(9.4)	355(14)	250(10)	325(12.8)	350(13.8)	520(20.5)	272(10.7)	420(16.5)
Net Weight	kg(lb.)	2(4.4)	3.5(7.7)	4.5(9.9)	5(11)	5.4(11.9)	9(19.8)	13.2(29)	20(44)

Machinery Jack TB series

Professional class


- Conforms to CE safety standard.

TB100

Static loading capacity on top 10 tonne

TB200

Static loading capacity on top 20 tonne

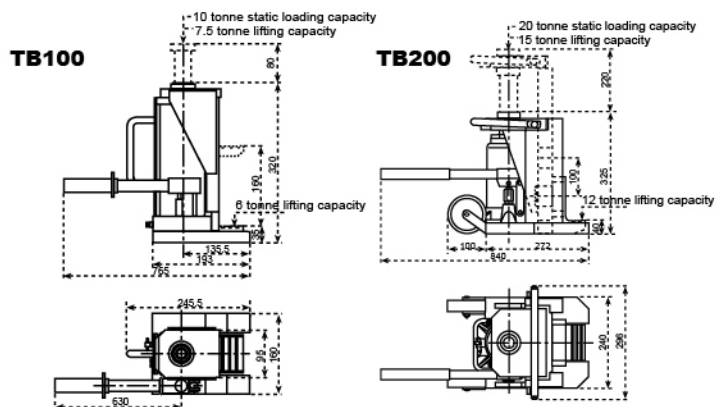

i-Lift No.	2311001	2311002
Model	TB100	TB200
Lifting Capacity	on top	kg(lb.) 7500(16500)
	on toe	6000(13200)
Lifting Stroke	mm(in.)	160(6.3)
Lifting Range of Top	mm(in.)	320-560(12.6-22)
Min. Loading Height Using Lifting Toe	mm(in.)	35(1.4)
Min. Loading Height Using Lifting Toe at Max. Adjustment	mm(in.)	160(6.3)
Lifting Range of toe	mm(in.)	35-195(1.4-7.7)
Net Weight	kg(lb.)	25(55)