


Toe Jack TG series

Professional class

- Super low profile lifting toe
- Adjustable Lifting toe
- Heavy duty structure

i-Lift No.		2310801	2310802
Model		TG30	TG80
Capacity	kg(lb.)	3000(6600)	8000(17600)
Lifting Stroke	mm(in.)	140(5.5)	140(5.5)
Min. Toe Height	mm(in.)	15(0.6)	20(0.8)
Lifting Range	mm(in.)	15-155(0.6-6.1)	20-160(0.8-6.3)
Net Weight	kg(lb.)	21.5(47.3)	28(61.6)

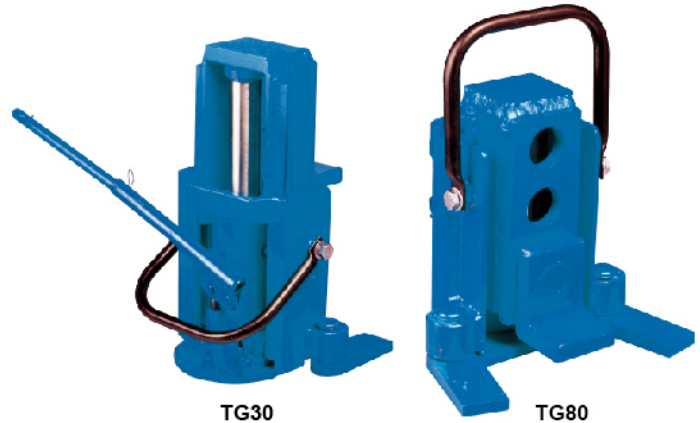

TG30

TG80

Industrial Toe Jack TL series


Professional class

- Heavy-duty, industrial quality, dual purpose jack.
- Designed for lifting loads with very low minimum clearances (foot) or high clearances (head).
- Ideal for house moving, machinery installation and application at shipyard, bridge building or plant construction sites.
- Great companion tool for machinery type rollers.
- Convenient 2001/2 swivel socket for easy operation in any direction on 5 and 10 ton models.
- Safety valve for overload protection.
- Features spring assisted return and over-travel protection on 5 or 10 ton models.
- Ram is made of heat treated special steel to resist rust and assure strength.
- Not affected by extreme temperatures.
- Pump handle included.
- **Conforms to ANSI/ASME B30.1 standards.**



TL-7102

i-Lift No.		2310901	2310902	2310903
Model		TL-7102	TL-7105	TL-7110
Toe Capacity	kg(lb.)	2000(4400)	5000(11000)	10000(22000)
Head Capacity	kg(lb.)	3000(6600)	6000(13200)	14000(30800)
Toe Height Min.	mm(in.)	16(0.6)	22(0.9)	28(1.1)
Toe Lift	mm(in.)	112(4.4)	120(4.8)	146(5.8)
Toe Height Max.	mm(in.)	128(5.1)	140(5.6)	170(6.7)
Head Height Min.	mm(in.)	238(9.4)	300(12)	333(13.1)
Head Height Max.	mm(in.)	350(13.8)	410(16.1)	460(18.1)
Toe Size	LxW mm(in.)	50x50(2x2)	57x75(2.3x3)	60x100(2.4x4)
Base Size	LxW mm(in.)	127x177(5x7)	275x185(10.6x7.3)	285x240(11.3x9.5)
Net Weight	kg(lb.)	8(18)	24(53)	38(84)



TL-7105



TL-7110