
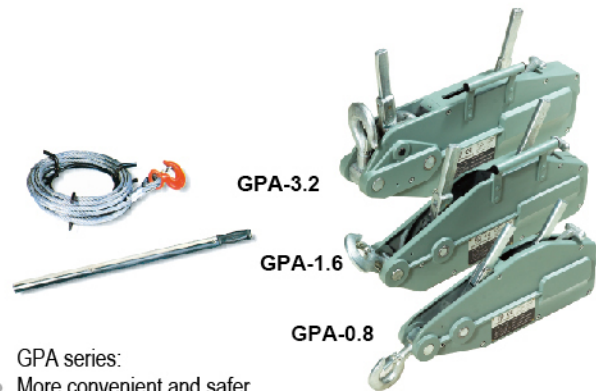
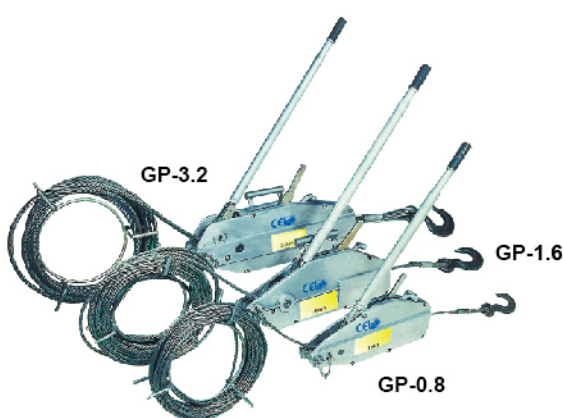


Grip Puller GP / GPA series


The i-LIFT grip puller is operable in the vertical, horizontal and diagonal planes, with a safe working load of 800, 1600 or 3200kg.

- Accurate operation.
- Virtually maintenance-free.
- Body made of high-strength cast aluminium with low own weight.
- Shearing pin breaks at 25% overload and operating lever bends at an overload of approximately 50%.
- Shearing pin can be replaced under full load.
- Spare shearing pins are located in the transport handle or in the operating lever (GP-0.8).
- Wire rope set; the standard wire rope length is 20 metres, 30, 40, 50 meters are available as option.
- **Conforms to CE safety standard.**

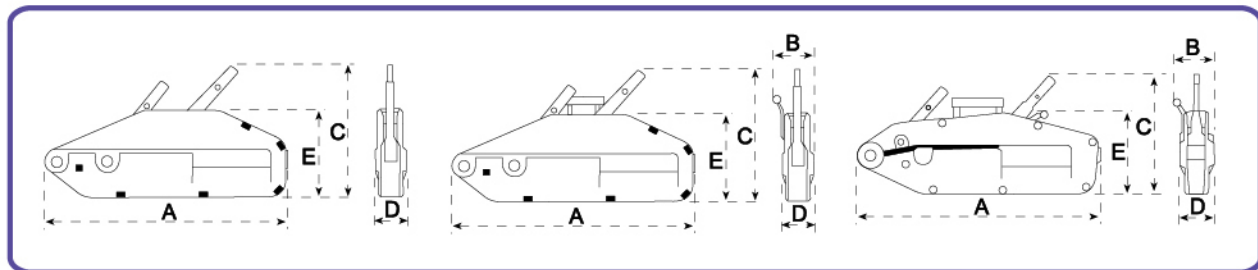

GPA series:

- More convenient and safer.
- The hook can be swivelled 360° instead of the pin in GP series.



i-Lift No.	2311801/901	2311802/902	2311803-903
Type	GP/GPA-0.8	GP/GPA-1.6	GP/GPA-3.2
A	426(16.8)	545(21.5)	660(26)
B	64(2.5)	97(3.8)	116(4.6)
C mm(in.)	235(9.3)	280(11)	325(12.8)
D	59(2.3)	72(2.8)	94(3.7)
E	170(6.7)	190(7.5)	220(8.7)

i-Lift No.	2311801	2311802	2311803	2311901	2311902	2311903
Type	GP-0.8	GP-1.6	GP-3.2	GPA-0.8	GPA-1.6	GPA-3.2
WLL (Vertical)	kg(lb.) 800(1760)	1600(3520)	3200(7040)	800(1760)	1600(3520)	3200(7040)
Hand Effort Max.	kg(lb.) 32(70.4)	42(92.4)	44(96.8)	32(70.4)	42(92.4)	44(96.8)
Lever Length	mm(in.) 740(29.1)	1120(44.1)		740(29.1)	1120(44.1)	
Wire rope Diameter	mm(in.) 8.3(0.3)	11(0.4)	16(0.6)	8.3(0.3)	11(0.4)	16(0.6)
Lifting Height at 1 Movement of Lever	mm(in.) 52(2)	55(2.2)	28(1.1)	52(2)	55(2.2)	28(1.1)
Weight without Rope	kg(lb.) 6.4(14)	12.4(27.3)	23.3(51.3)	6.4(14)	12.4(27.3)	23.3(51.3)
Weight 20m Rope	kg(lb.) 7(15.4)	11.5(25.3)	23(50.6)	7(15.4)	11.5(25.3)	23(50.6)