

Heavy Duty Flat Web Sling ED series

For USA

Professional class

B. Endless Slings



ED1-3

Plies of Web			One Ply						Two Ply					
i-lift No.			2314501	2314502	2314503	2314504	2314505	2314506	2314601	2314602	2314603	2314604	2314605	2314606
Model			ED1-1	ED1-2	ED1-3	ED1-4	ED1-5	ED1-6	ED2-1	ED2-2	ED2-3	ED2-4	ED2-5	ED2-6
Web Width (in.)			1	2	3	4	5	6	1	2	3	4	5	6
Rated Capacity (lbs)	Vertical		3200	6400	8800	11500	13700	16500	6200	12200	16700	20700	24600	28600
	Chocker		2560	5120	7040	9200	10960	13200	4960	9760	13360	16560	19680	22880
	Vertical Basket		6400	12800	17600	23000	27400	33000	12400	24400	33400	41400	49200	57200
	≥60° Basket		5440	10880	14960	19550	23290	28050	10540	20740	28390	25190	41820	48620
	45°≤Y60° Basket		4480	8960	12320	16100	19180	23100	8680	17080	23380	28980	34440	40040
	30°≤Y45° Basket		3200	6400	8800	11500	13700	16500	6200	12200	16700	20700	24600	28600


Usual length 3ft, 4ft, 5ft, 6ft, 8ft, 10ft, 12ft, 15ft, 20ft, 25ft, 30ft.

Heavy Duty Flat Web Sling HFW series

For USA

Professional class

- All i-LIFT flat webbing slings meet or exceed current U.S. industry and government requirements of OSHA and ASME B30.9, and can be modified according to local standard as required.
- Class 7 webbing possessing a minimum certified tensile strength of 9800lbs/in. width.

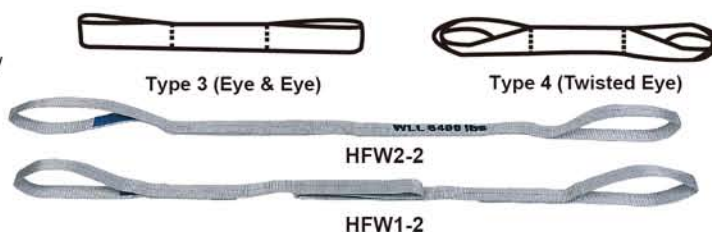

Plies of Web			One Ply						Two Ply					
i-lift No.			2314701	2314702	2314703	2314704	2314705	2314706	2314801	2314802	2314803	2314804	2314805	2314806
Model			HFW1-1	HFW1-2	HFW1-3	HFW1-4	HFW1-5	HFW1-6	HFW2-1	HFW2-2	HFW2-3	HFW2-4	HFW2-5	HFW2-6
Web Width (in.)			1	2	3	4	5	6	1	2	3	4	5	6
Eye Length (in.)			8.5	10	11	12	14	16	8.5	10	11	12	14	16
Rated Capacity (lbs)	Vertical		1600	3200	4700	6200	7800	9300	3200	6400	8800	11500	13700	16500
	Chocker		1280	2560	3760	4960	6240	7440	2560	5120	7040	9200	10960	13200
	Vertical Basket		3200	6400	9400	12400	15600	18600	6400	12800	17600	23000	27400	33000
	≥60° Basket		2720	4480	7990	10540	13260	15810	5400	10880	14960	19550	23290	28050
	45°≤Y60° Basket		2240	4340	6580	8680	10920	13020	4480	8960	12320	16100	19180	23100
	30°≤Y45° Basket		1600	3200	4700	6200	7800	9300	3200	6400	8800	11500	13700	16500
Minimum Qty. (pcs)			100		60		30		100		60		30	

Usual length 3ft, 4ft, 5ft, 6ft, 8ft, 10ft, 12ft, 15ft, 20ft, 25ft, 30ft.