

Electric Order Picker WF



- ▲ Dramatically reduces strain, increases safety and productivity in those repeat picking applications.
- ▲ Hand pushed unit which is easy to maneuver.
- ▲ Quick battery operated lift to desired height.
- ▲ Two parking brakes ensure safety.
- ▲ Supplied with battery and automatic charger.
- ▲ Additional safety features such as mandatory two-handed controls safety bar, etc.
- ▲ **Conforms to EN280.**

i-Lift No.		1540101
Model		WF200
Capacity (including operator)	kg(lb.)	200(400)
Lowered Table Height	(mm)(in.)	670(26.4)
Raised Table Height	(mm)(in.)	1500(60)
Platform Size	(mm)(in.)	600×550(23.6×21.7)
Power Unit	(W)	DC 800
Battery (service free)	(Ah/V)	60/12
Overall Size	(mm)(in.)	1210×630×1040(47.6×24.8×40.9)
Net Weight	kg(lb.)	151(332.2)




Order Picker FT series

- ▲ Improved stability form extra stabilizer and floor brake.
- ▲ Capacity: 200kg.
- ▲ Maintenance-free battery.
- ▲ **Conform to EN280.**

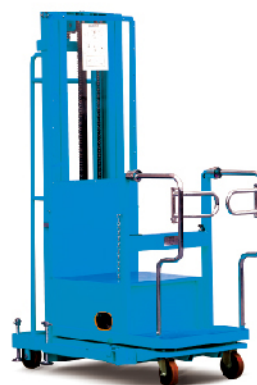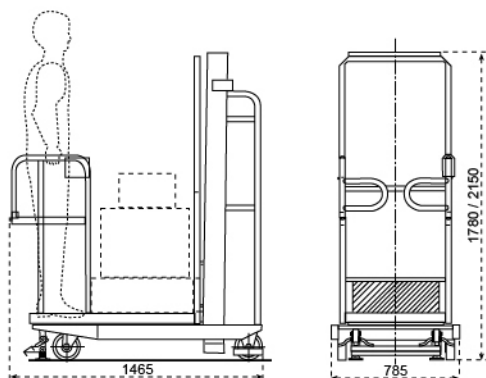

i-Lift No.		1540201	1540202
Model		FT200	FT200A
Capacity (including operator)	kg(lb.)	200(440)	
Lowered Table Height	(mm)(in.)	480(18.9)	560(22)
Raised Table Height	(mm)(in.)	2720(107.1)	3500(137.8)
Platform Size	(mm)(in.)	640×595(25.2×23.4)	
Overall Dimensions (L×W×H)	(mm)(in.)	1465×785×1780 (57.7×31×80.1)	1465×785×2150 (57.7×31×86.4)
Min. Clearance to ground	(mm)(in.)	22(0.9)	
Lifting Speed	without load	(m/s)	0.26
	with load	(m/s)	0.23
Lowering Speed	without load	(m/s)	0.13
	with load	(m/s)	0.13
Cycles per fully charging	≤100 times (when battery is full)		
Time per charging	1 hours		
Work condition	S2, intermission		
Power supply	(Ah/V)	DC, 100/12	DC, 80/12
Net Weight	kg(lb.)	303(666.6)	330(726)



Optional foot brake



FT200A