


Full Electric Stacker FN / FN-AC series

With DC or AC technology

- ▲ Tiller arm is mounted on one side for optimal control and visibility.
- ▲ High-comfort tiller grip reduces fatigue, improving productivity.
- ▲ Heavy-duty design with top quality mast construction.
- ▲ Powerful drive and power unit made in Europe.
- ▲ Top quality electronic control system from Curtis.
- ▲ Multi-function handle includes crawl button, butterfly travel speed controls and lift/lower control offer variable speed adjustment.
- ▲ Drive unit with electromagnetic brake, maintenance free AC technology.
- ▲ **Conforms to EN1757-1:2001, EN 1726.**

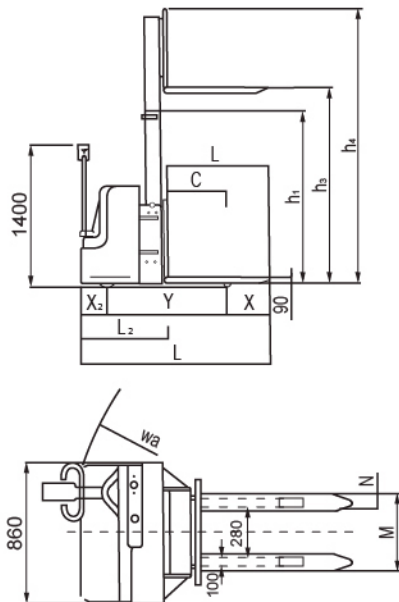

Standard

FN1529

Option



i-Lift No.		1550801	1550802	1550803	1550804	1550805	1550806
Model		FN1225	FN1229	FN1233	FN1525	FN1529	FN1533
i-Lift No.		1550807	1550808	1550809	1550810	1550811	1550812
Model		FN1225AC	FN1229AC	FN1233AC	FN1525AC	FN1529AC	FN1533AC
Capacity	kg(lb.)	1200(2640)			1500(3300)		
Lifting Height	mm(in.)	2450(96.5)	2900(114.2)	3300(129.9)	2450(96.5)	2900(114.2)	3300(129.9)
Min. Fork Height	mm(in.)	90(3.5)					
Load Centre	mm(in.)	600(23.6)					
Fork Length	mm(in.)	1150(45.3)					
Fork Overall Width	mm(in.)	540(21.3)					
Driver Wheel		Φ250mm, 1200W/24V					
Driver Wheel (AC)		Φ250mm, 1200W/24V (AC)					
Power Pack	(KW/V)	2.2/24					
Traction Battery	(Ah/V)	165/24					
Net Weight	kg(lb.)	648(1425.6)	670(1474)	691(1520.2)	658(1447.6)	680(1496)	701(1542.2)
Dimension	X2 mm(in.)	190(7.5)					
	L2 mm(in.)	774(30.5)					
	h1 mm(in.)	1800(70.9)	2025(81)	2025(81)	1800(70.9)	2025(81)	2025(81)
	h4 mm(in.)	3094(121.9)	3546(139.6)	3946(155.4)	3096(121.9)	3546(139.6)	3946(155.4)
	X mm(in.)	455(17.9)					
	Y mm(in.)	1279(50.4)					
	L mm(in.)	1924(75.7)					
	N mm(in.)	160(6.3)					
	h3 mm(in.)	2450(96.5)	2900(114.2)	3300(129.9)	2450(96.5)	2900(114.2)	3300(129.9)
	Wa mm(in.)	1540(60.6)					