


Electric Stacker With Straddle Leg FW / FW-AC series


With DC or AC technology

- ▲ Heavy duty design with top quality mast construction.
- ▲ Straddle leg design suitable for two faces or low pallet.
- ▲ Powerful power pack with European technology.
- ▲ Drive unit with electromagnetic brake.
- ▲ Top quality electronic control system from Curtis.
- ▲ **Conforms to EN1757-1, EN 1726.**

Option

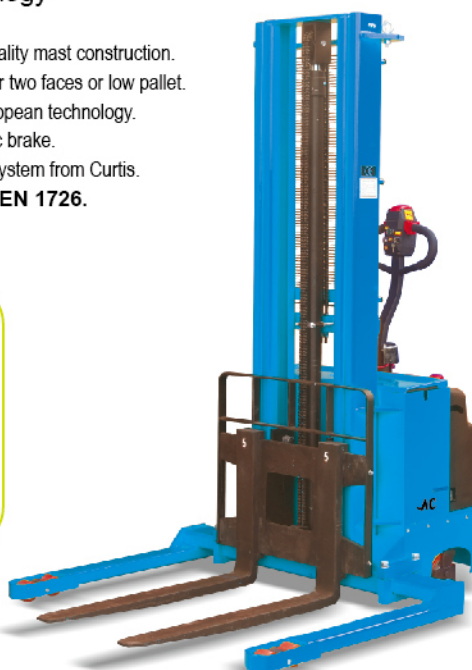

FW1533-AC

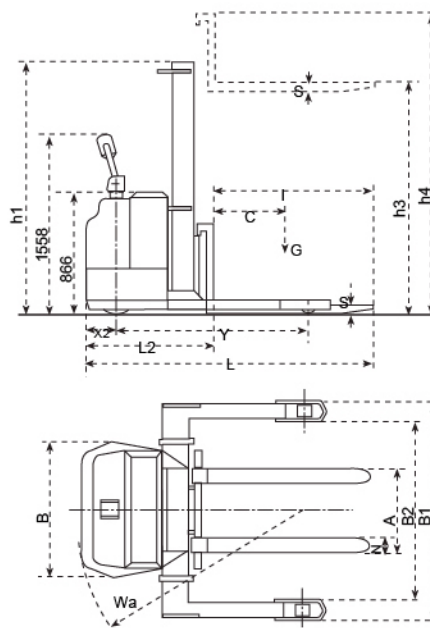

i-Lift No.		1550901	1550902	1550903	1550904	1550905	1550906	1550907	1550908	1550909	1550910
Model		FW1216	FW1516	FW1224	FW1524	FW1229	FW1529	FW1231	FW1531	FW1233	FW1533
i-Lift No.		1550911	1550912	1550913	1550914	1550915	1550916	1550917	1550918	1550919	1550920
Model		FW1216AC	FW1516AC	FW1224AC	FW1524AC	FW1229AC	FW1529AC	FW1231AC	FW1531AC	FW1233AC	FW1533AC
Capacity	kg(lb.)	1200(2640)	1500	1200(2640)	1500(3300)	1200(2640)	1500(3300)	1200(2640)	1500(3300)	1200(2640)	1500(3300)
Lifting Height	h3 mm(in.)	1600(63)		2450(96.5)		2900(114.2)		3100(122)		3300(129.9)	
Min. Fork Height	h mm(in.)					65(2.6)					
Load Centre	C mm(in.)					500(20)					
Fork Length	l mm(in.)					1000(40)					
Motors Traveling	(KW/V)					1.2/24					
Motors Traveling (AC)	(KW/V)					1.2/24 (AC)					
Motors Lifting	(KW/V)					2.2/24					
Service Free Battery						200Ah/24V					
Battery Charger						20A/24V					
Traction Battery (option)						240Ah/24V					
Front Roller	mm(in.)					Polyurethane, Tandem $\Phi 78 \times 70 (3 \times 2.7)$					
Rear Roller	mm(in.)					Polyurethane, $\Phi 150 \times 75 (6 \times 3)$					
Drive Wheel	mm(in.)					Polyurethane, $\Phi 250 \times 80 (10 \times 3.1)$					
Net Weight	kg(lb.)	820(1804)		885(1947)		895(1969)		905(1991)		910(2000)	
Dimension	S mm(in.)					38(1.5)					
	X2 mm(in.)					200(8)					
	Y mm(in.)					1283(50.5)					
	L2 mm(in.)					892(35.1)					
	L mm(in.)					1792(70.6)					
	B1 mm(in.)					1197-1502(47.1-60)					
	B2 mm(in.)					965-1270(38-50)					
	A mm(in.)					230-790(9.1-31.1)					
	N mm(in.)					100(4)					
	h1 mm(in.)	2166(85.3)		1876(73.9)		2101(82.7)		2201(86.7)		2301(90.6)	
	h3 mm(in.)	1600(63)		2450(96.5)		2900(114.2)		3100(122)		3300(129.9)	
	h4 mm(in.)	2460(96.9)		3310(130.3)		3760(148)		3960(156)		4160(163.8)	
	B mm(in.)					940(37)					
	Wa mm(in.)			1533(60.4)						1548(60.9)	