


Full Electric Stacker FK / BK series

- ▲ Heavy duty design with top quality mast construction.
- ▲ Powerful drive wheel and power unit made in Europe.
- ▲ Top quality electronic control system from Curtis.
- ▲ Conforms to EN1757-1:2001, EN 1726.

Option




BK1545



FK1545



BKW1555 (straddle leg)

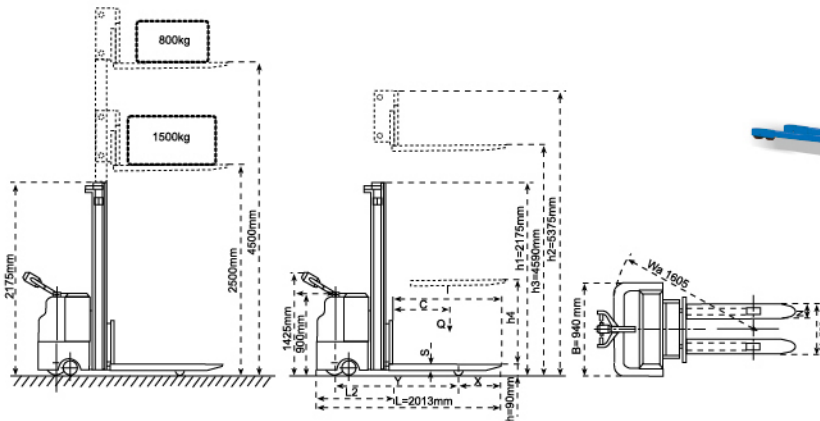

i-Lift No.	1551101	1551102	1551103
Model	FK1545	BK1545	BKW1555
Type	Standard	Platform	Platform
Capacity	kg(lb.)	1500(3300)	
Load Centre	mm(in.)	600(23.6)	
Max. Fork Height	mm(in.)	4500(177.2)	5500(216.5)
Lowered Fork Height	mm(in.)	90(3.5)	65(2.6)
Full Free Lifting Height	mm(in.)	1550(61)	1717(67.6)
Fork Length	mm(in.)	1150(45.3)	1000(40)
Fork Overall Width	mm(in.)	560(22)	200-950(8-37.4)
Fork Individual Width	mm(in.)	160(6.3)	100(4)
Travelling Speed (with & without load) (km/h)		5.2/6.8	
Lifting Speed (with & without load) (mm/s)		127/170	
Lowering Speed (mm/s)	150/128		127/170
Motors Travelling (W)		1200	
Motors Lifting (W)		3000	
Front Roller, Tandem	mm(in.)	Φ78×70(3x2.7)	
Rear Roller	mm(in.)	Φ150×50(6x2)	
Driver Wheel	mm(in.)	Φ250×80(10x3.1)	
Traction Battery (Ah/V)		240/24	
Battery Charger (A/V)		30/24	
Weight of battery	kg(lb.)	230(506)	
Overall Dimensions	mm(in.)	2013x940x2175(98.7x42.5x85.6)	2507x940x2175(100x42.5x85.6) 2000x1200x2560(80x47.2x100.8)
Net Weight (without battery)	kg(lb.)	1010(2222)	1035(2277) 1370(3014)