


Lift & Tilt Table BL series

- ▲ The Lift & Tilt Tables from i-LIFT are specifically designed to allow an operator to feed and unload parts from tote boxes or containers quickly and easily without lifting, bending, stretching, or reaching.
- ▲ When in its lift and tilt position, the unit holds totes or containers at a comfortable working height and angle that allows operators to easily reach parts even at the bottom of the container.
- ▲ The working table is elevated by means of a foot actuated hydraulic cylinder. As the table is raised, it automatically tilts to an angle of 45° at full elevation. Built-in retaining lip keeps containers in place.

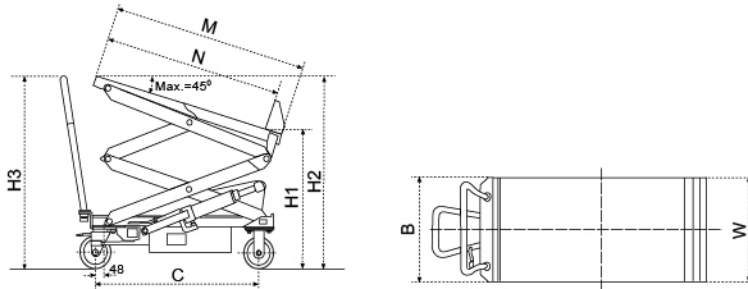


BL40

i-Lift No.		1311001	1311002	1311003
Model		BL15	BL40	BL80
Capacity	kg(lb.)	150(330)	400(880)	800(1760)
Table Size	TxW (mm)(in.)	830x500(32.7x20)	830x520(32.7x20.5)	
Dimensions	M (mm)(in.)	830(32.7)	930(36.6)	930(36.6)
	N (mm)(in.)	748(29.4)	830(32.7)	
Table Height	H1(min/max) (mm)(in.)	415/880(16.3/34.6)	435/900(17.1/35.4)	440/1000(17.3/40)
	H2(min/max) (mm)(in.)	415/1400(16.3/55.1)	435/1560(17.1/61.4)	438/1570(17.2/61.8)
Handle Height	H3 (mm)(in.)	1100(44)	1130(44.5)	
Wheel Dia.	(mm)(in.)	Φ125(5)	Φ150(5)	
Overall Size	BxC (mm)(in.)	500x1010(20x40)	520x1355(20.5x53.3)	
Foot Pedal to Max. Height		20	50	80
Net Weight	kg(lb.)	92(202.4)	123(270.6)	145(319)

Transfer Lift Table BT / BE series

- ▲ Easier for loading and unloading operations by means of ball transfer unit.
- ▲ As the steel balls are raised, the goods on the table become very easy to move.
- ▲ As the steel balls are lower, the goods stay on table firmly.
- ▲ Electric version: 700W DC power pack.

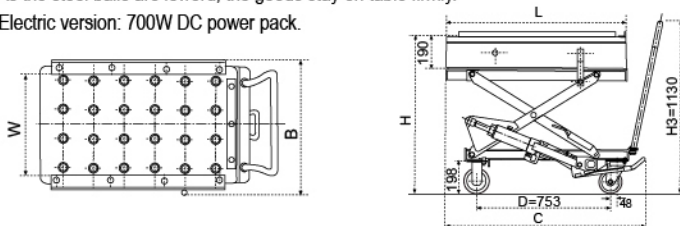

BT45

i-Lift No.	1310701	1310702	1310703	1310704	1310801	1310802	1310803	1310804
Model	BT20	BT45	BT70	BT100	BE45	BE70	BE100	BE45L
Type	Manual				Electric			
Capacity (kg)	200(440)	450(990)	700(1540)	1000(2200)	450(990)	700(1540)	1000(2200)	450(990)
Table Size LxW (mm)	830x500(32.7x20)	550x1006(22x40)			550x1006(22x40)			672x1516(26.5x60)
Table Height Hmin/Hmax (mm)	520/1000(20.5/40)	632/1185(25/46.7)	632/1150(25/45.3)	647/1140(25/45)	640/1140(25/45)	670/1140(26.4/45)	670/1140(26.4/45)	619/1329(24.4/52.3)
Handle Height H3 (mm)	1100(44)	1130			1130			
Wheel Diameter (mm)	Φ125(5)	Φ150			Φ150			
Overall Size BxC (mm)	560x1010(22x40)	580x1185(22.8x47)	580x1260(22.8x49)	580x1260(22.8x49)	580x1185(22.8x47)	580x1260(22.8x49)		672x1780(26.5x70)
Stroke to Max.Height	30	65	75	75	—			
Lifting Speed (s)	—				15			
Net Weight (kg)	105(231)	153(336.6)	155(341)	172(378.4)	183(402.6)	169(371.8)	204(448.8)	273(600)