


Pivoting Adjustable Spring-Loaded Swing Safety Gate


BRR1

- Adjustable width from 560 to 1000 mm in all positions
- Easy to install: mounts in minutes with simple hand tools
- No cutting, welding or drilling required
- Mounts to walls, square or round tubes, or angle irons
- Parallel or perpendicular installation
- Automatic closing with positive stops
- Supplied with post mounting brackets

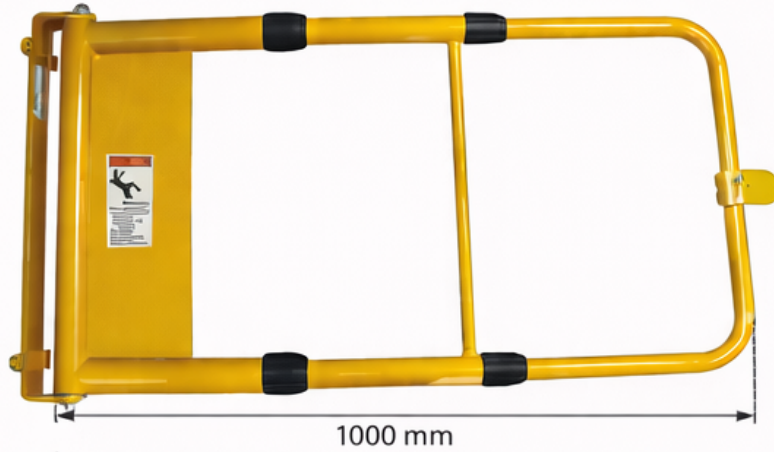


BRR2

- Adjustable width from 407 to 661 mm
- Automatic closing with positive stops
- Supplied with post mounting brackets



BRR2


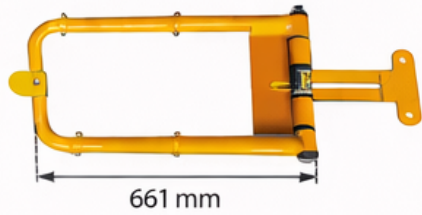


BRR3

- Adjustable width from 612 to 1019 mm
- Automatic closing with positive stops
- Supplied with post mounting brackets



BRR3

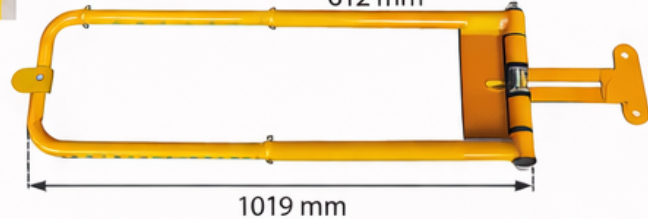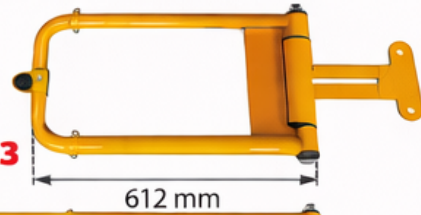

Model	BRR1	BRR2	BRR3
Gate width min/max	560/1000	407/661	612/1019
Gate height mm	500	330	330
Weight kg	12	13	15



Compatibles avec poteaux de protection W810 and W811