


Single Column Automatic Clamping Lifting Stacker

- ▲ Compact and stable structure.
- ▲ High performance improvement motor: efficient, stable, and has a long service life.
- ▲ Lifting and clamping can be controlled by a control handle for greater safety.
- ▲ Adjustable speed, continuously variable transmission.

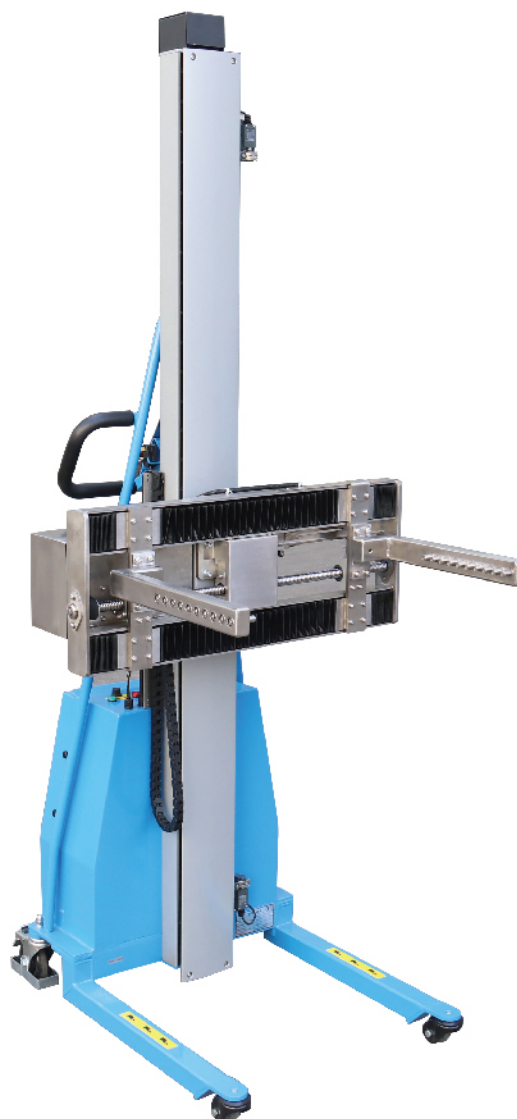

E200B

i-lift No.		1511105	1511106
Model		E200B	E200C
Capacity	kg(lb.)	200(440)	
Overall Size LxWxH	mm(in.)	908x830x2080(35.7x32.7x81.9)	908x1330x2080(35.7x52.4x81.9)
Outer Width of the Clamp	mm(in.)	700(27.6)	1300(51.2)
Clamping Range	mm(in.)	250-600(9.8-23.6)	410-1210(16.1-47.6)
Clamp Work Height	mm(in.)	300-1850(11.8-72.8)	
Single Clamp Width	mm(in.)	50(2)	
Outer Width of Outriggers	mm(in.)	600(23.6)	
Leg Height	mm(in.)	85(3.3)	
Front Wheel	mm(in.)	Φ50x30(2x1.2)	
Rear Wheel	mm(in.)	Φ100x30(3.9x1.2)	
Battery	V/AH	4*12/20	
Voltage	V	48	
Motor power	kw	0.8	
Net Weight	kg(lb.)	168(369.6)	175(385)