


# Semi-Electric Stacker With Adjustable Fork EMS series

- ▲ Heavy duty design with quality construction.
- ▲ Straddle leg design makes it more stable.
- ▲ Semi-electric design to reduce labour intensity and raise working efficiency.
- ▲ This stacker can lift cargo and transport in short distance.
- ▲ It has been widely used in workshop、warehouse、wharf、station、depot and so on.
- ▲ Adjustable fork make it suitable for different pallet.

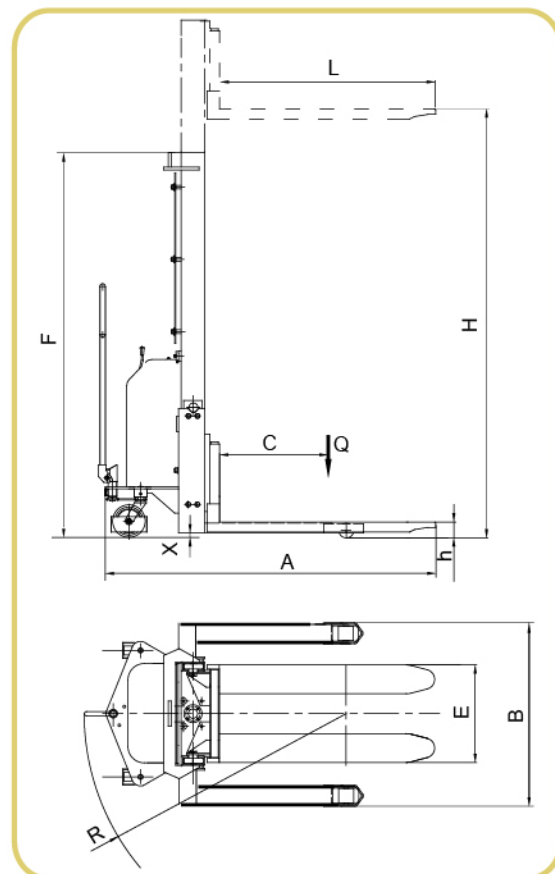

**EMS1025**

i-lift No.		1551901	1551902	1551903	1551904	1551905	1551906	1551907	1551908
Model		EMS1016	EMS1025	EMS1030	EMS1033	EMS1516	EMS1525	EMS1530	EMS1533
Capacity	kg(lbs)	1000(2200)				1500(3300)			
Lifting height H	mm(inch)	75-1600(3-63)	75-2500(3-98.4)	75-3000(3-118)	75-3300(3-130)	75-1600(3-63)	75-2500(3-98.4)	75-3000(3-118)	75-3300(3-130)
Fork length L	mm(inch)	915(36)							
Outside width between forks E	mm(inch)	190-800(7.5-31.5)				210-800(8.3-31.5)			
Load center C	mm(inch)	400(15.7)							
Min. outside turning radius R	mm(inch)	2200(86.6)							
Min. clearance from ground X	mm(inch)	≥30(1.2)							
Max. lifting speed with full loading	mm/s	≥70				≥50			
Lowering speed		Controllable							
Lifting motor		12V/1600W							
Battery		12V/100Ah							
Charger		200V/12V 110V/12V							
Overall dimension	Length A	1550(61)							
	Width B	1080-1360(42.5-53.5)							
	Height F	2020(79.5)	1770(69.7)	2020(79.5)	2170(85.4)	2070(81.5)	1770(69.7)	2020(79.5)	2170(85.4)
Load wheel	mm(inch)	100(4)							
Steering wheel	mm(inch)	200(8)							
Net weight	kg(lbs)	366(805.2)	448(985.6)	468(1029.6)	480(1056)	390(858)	472(1038.4)	493(1084.6)	513(1128.6)