

Conductive ESD Tray

▲ Temperature-resistant from -60 to 250°F(-51 °C to 121 °C).


▲ Ideal for circuit boards or delicate electrical components.

Safely store and transport electronic components throughout your facility with the Conductive ESD Tray.

This 26" x 18" tray is perfect for use with circuit boards or delicate electrical components, or when moving sensitive electrical parts on conveyors. It is molded of black thermoset-composite material with a permanent surface-resistivity of 105 ohms/sq. Black Conductive ESD Tray meets or exceeds ANSI/ESD S20.20 standard for ESD protection and is temperature resistant from -60 to 250°F(-51 °C to 121 °C).



ESD

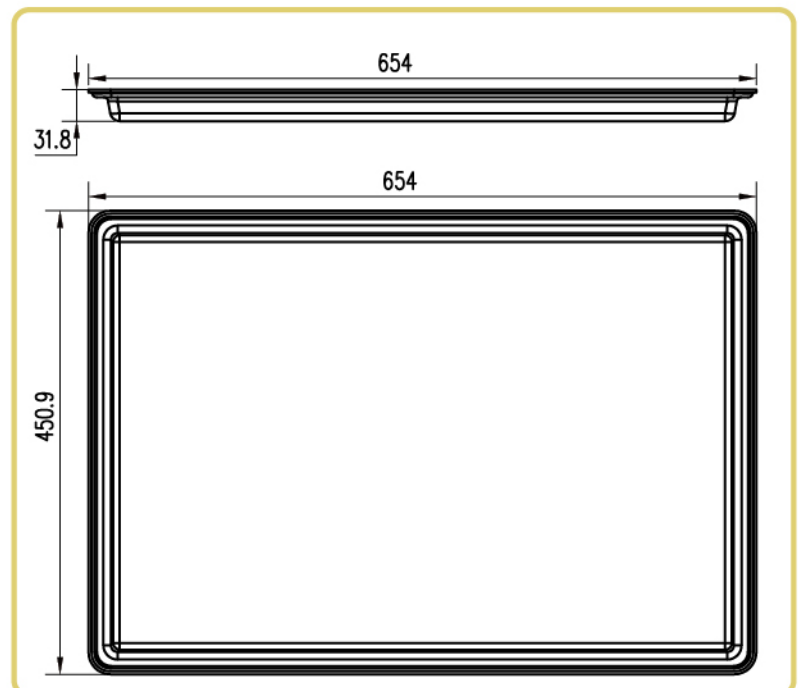

i-Lift No.		1512401
Model		ESD
Width	mm(in.)	450.9(17.8)
Length	mm(in.)	654(25.8)
Height	mm(in.)	31.8(1.3)
Weight	kg(lb.)	1.25(2.8)
Conductivity		10 ⁵ Ω
Material		Thermoset Molded Composite
Color Family		Black