

Lift Table BZ / EZ series

- ▲ Min.Height 230mm (9inch)
- ▲ Foot operated hydraulic pump (manual type)
- ▲ Meet EN1570 norm and ANSI/ASME safety standards (electric type)



BZ70B





EZ75A

i-Lift No.	1310101	1310102	1310103	1310104
Model	BZ70A	BZ70B	EZ75A	EZ75B
Type	Manual		Electric	
Capacity	kg (lbs)		kg (lbs)	
	700 (1540)		750 (1650)	
Min.Height	mm (inch)		230 (9)	
Max.Height	830(32.7)	1050(41.3)	830(32.7)	1050(41.3)
Lifting Time	s		12-17	13-18
Platform Size	916×610 (36×24)	1220×610 (48×24)	916×610 (36×24)	1220×610 (48×24)
Handle Height	mm (inch)		935 (37)	
Front Wheel Dimeter	mm (inch)		Φ125 (Φ5)	
Steering Wheel Dimeter	mm (inch)		Φ100 (Φ4)	
Overall Size	1280×750×935 (50×30×37)	1580×750×935 (62×30×37)	1246×750×935 (49×30×37)	1550×750×935 (61×30×37)
Power Pack	kw/v (hp/v)		0.8/12 (1.1/12)	
Battery	Ah/v		54/12	
Net Weight	130 (285)	158 (350)	168 (370)	192 (420)

Lift Table ESF / ESM series

- ▲ Self-propelled & electric lifting.
- ▲ Curtis controller & HALL accelerator.
- ▲ Meet EN1570 norm and ANSI/ASME safety standards.

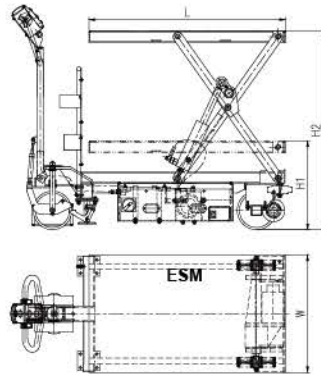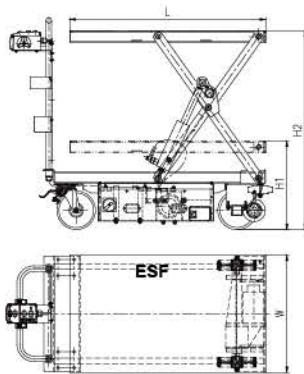

ESF50D



ESM50D



Option with scales

i-Lift No.	1310201	1310202	1310203	1310204	1310205	1310206	1310207	1310208	
Model	ESF50	ESF50D	ESM50	ESM50D	ESM80	ESM80D	ESM91	ESM91D	
Type	Fixed Handle			Middle Steering Handle					
Capacity	500(1100)				800(1760)		910(2000)		
Table Size	LxW(mm)(in.)				1020x610(40.2x24)				
Table Heght	H(Max/Min)(mm)(in.)	1000/460(40/18)	1720/460(68/18)	1000/460(40/18)	1720/470(68/18)	1075/460(42/18)	1850/520(73/21)	1075/460(42/18)	1850/520(73/21)
Lifting Cycle	55	40	55	40	45	40	45	40	
Wheel Dia.	(mm)(in.)				200(8)				
Lifting/Lowering Time	(s)				15/15				
Overall Size	(mm)(in.)				1200x670x1030(47.2x26.4x40.6)				
Net weight	kg(lb.)	214(470.8)	220(484)	220(484)	235(517)	240(528)	250(550)	240(528)	250(550)