

Hand Stacker with Adjustable fork FXS series

- ▲ Pump-up manual straddle truck offers Easy Lifting.
- ▲ Both a hand and foot operated hydraulic lift pump.
- ▲ High-visibility mast, single lifting chain, heavy duty mast rollers and plexiglass mast guard are standard.
- ▲ Adjustable forks and legs.




FX1516

i-lift No.		1552501	1552502	1552503	1552504	1552505	1552506
Model		FXS1016	FXS1025	FXS1030	FXS1516	FXS1525	FXS1530
Capacity	kg(lb.)	1000(2200)			1500(3300)		
Load Centre	mm(in.)	400(15.7)					
Max. Fork Height	mm(in.)	1600(63)	2500(98.4)	3000(118)	1600(63)	2500(98.4)	3000(118)
Min. Fork Height	mm(in.)	75(3.5)					
Fork Length	mm(in.)	915(36)					
Outside width between forks	mm(in.)	210-800(8.3-31.5)			230-800(9-31.5)		
Inside width between forks	mm(in.)	10-600(0.4-23.6)			10-580(0.4-22.8)		
Overall Size	mm(in.)	1480x1360x2020 (58.3x53.5x79.5)	1480x1360x1770 (58.3x53.5x69.7)	1480x1360x2020 (58.3x53.5x79.5)	1480x1360x2070 (58.3x53.5x81.5)	1480x1360x1770 (58.3x53.5x69.7)	1480x1360x2020 (58.3x53.5x79.5)
Net Weight	kg(lb.)	270(594)	358(787.6)	378(831.6)	282(620.4)	367(807.4)	387(851.4)

Hand Stacker KS series

- ▲ Lifted by towbar and lowered by manual control.
- ▲ Double action hand pump provides quicker lifting.
- ▲ Mechanical switch for unloaded and loaded lift.
- ▲ Chain drive steering system offers maximal maneuverability with 180° turning angle.
- ▲ **Conforms to EN1757-1.**

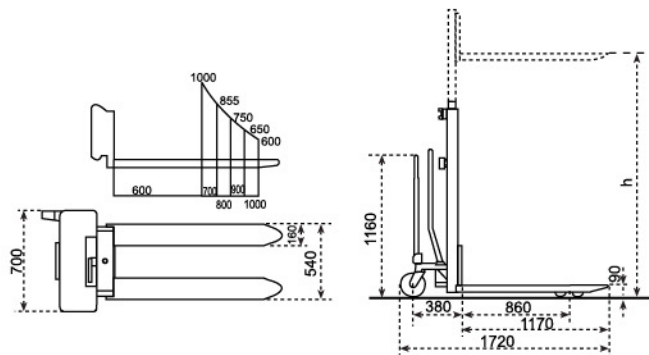

KS1015

i-Lift No.	1520801	1520803
Model	KS1015	KS1027
Capacity	1000(2200)	
Lifting Height	1500(60)	2750(108.3)
Lifting per Stroke	30(1.2)	
Min. Fork Height	90(3.5)	
Fork Length	1150(45.3)	
Fork overall Width	540(21.3)	
Load Wheel	Φ78×80(3x3.1) nylon	
Steering Wheel	Φ150×55(6x2.2) nylon	
Overall Size	LxWxH (mm) (in.)	1600x700x1950 (63x27.6x76.8)
Net Weight	(kg) (lb.)	240(528)