

Stationary Lift Table HD / HT / HF series



HD2000



HT2000




HF800

i-lift No.	1312101	1312102	1312103	1312201	1312202	1312203	1316001	1316002	1316003
Model	HD1000	HD2000	HD4000	HT1000	HT2000	HT4000	HF400	HF800	HF1600
Capacity kg(lb.)	1000(2200)	2000(4400)	4000(8800)	1000(2200)	2000(4400)	4000(8800)	400(880)	800(1760)	1600(3520)
Lowered Height (mm)(in.)	305(12)	360(14.2)	400(15.7)	470(18.5)	560(22)	625(24.6)	600(23.6)	710(28)	800(31.5)
Raised Height (mm)(in.)	1780(70)		2050(80.7)	3000(118)		3200(126)	4140(163)	4200(165.3)	4250(167.3)
Platform Size (mm)(in.)	820×1300 (32.3×51.2)	850×1300 (33.5×51.2)	1700×1200 (67×47.2)	1700×1000 (67×40)		1700×1200 (67×47.2)	1700×1000 (67×40)		1700×1200 (67×47.2)
Base Frame Size (mm)(in.)	680×1266 (26.8×49.8)	785×1255 (31×49.4)	1600×930 (63×36.6)	1600×1000 (63×40)	1606×1010 (63×40)	1610×1140 (63.4×44.9)	1600×1000 (63×40)	1606×1010 (63×40)	1610×1140 (63.4×44.9)
Lift Time (second)	15~25	20~30	40~50	30~40	45~55	50~65	30~40	70~80	50~65
Power Pack	380V/50HZ, AC 1.1kw					380V/50HZ, AC 4kw	380V/50HZ, AC 1.1kw		380V/50HZ, AC 4kw
Net Weight kg(lb.)	210(462)	295(649)	520(1144)	450(990)	750(1650)	910(2002)	548(1205.6)	858(1887.6)	1045(2299)

“E” Low Profile Lift Table HE series

- ▲ These tables achieve a low closed height, eliminating the need for a pit installation.
- ▲ They are manufactured to all European safety standards including EN1570:1999.
- ▲ Remote power pack with pedestal and controls, IP54 protection.
- ▲ 24V control box with UP and DOWN buttons and emergency stop.
- ▲ External power pack equipped with a relief valve against overloading and a compensated flow valve for controlling lowering speed. Power supply are AC 380V/50HZ/3phase.
- ▲ Hose burst safety valve to stop the lift table lowering in case of hose breakage.

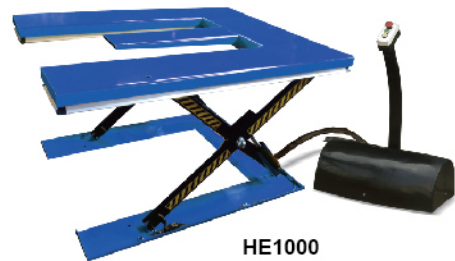

HE1000

i-Lift No.	1313501	1313502	1313503	1313504
Model	HE500	HE1000	HE1500	HE2000
Capacity kg(lb.)	500(1100)	1000(2200)	1500(3300)	2000(4400)
Platform Size LxW(mm)(in.)	1400x1200(55x47.2)		1500x1300(60x51.2)	
Min. Height (mm)(in.)	85(3.3)			100(4)
Max. Height (mm)(in.)	885(33.7)			820(32.3)
Stroke (mm)(in.)	800(31.5)			720(28.3)
Lifting Time (second)	25-30		30-40	
Power Pack	380V/50HZ, 0.75KW	380V/50HZ, 1.1KW	380V/50HZ, 2.2KW	
Net Weight kg(lb.)	207(455.4)	280(616)	380(836)	500(1100)