

Hand Stacker HE series

- ▲ Unique technology of quick lift system.
- ▲ Compact design and strong, accurate steel construction.
- ▲ Top quality 1 piece "C" section forks for greatest strength.
- ▲ Top of stroke bypass valve built in.
- ▲ **Conforms to EN1757-1:2001.**



HE1023


i-Lift No.		1560101	1560102	1560103
Model		HE1011	HE1016	HE1023
Capacity	(kg)(lb.)	1000(2200)		
Lifting height	(mm)(in.)	1100(44)	1600(63)	2350(92.5)
Lifting per stroke	(mm)(in.)	25(1)		
Min. fork height	(mm)(in.)	80(3.1)		
Fork length	(mm)(in.)	1150(45.3)		
Fork overall width	(mm)(in.)	550(21.7)		
Load wheel	(mm)(in.)	Φ80×85(3x3.3) polyurethane		
Steering wheel	(mm)(in.)	Φ180×50(7x2) polyurethane		
Overall size L×W×H	(mm)(in.)	1710×750×1350 (67.3x29.5x53.1)	1710×750×1980 (67.3x29.5x78)	1710×750×1645 (67.3x29.5x65.1)
Net weight	(kg)(lb.)	265(583)	293(644.6)	346(761.2)

Hand Stacker KS series

- ▲ Lifted by towbar and lowered by manual control.
- ▲ Double action hand pump provides quicker lifting.
- ▲ Mechanical switch for unloaded and loaded lift.
- ▲ Chain drive steering system offers maximal maneuverability with 180° turning angle.
- ▲ **Conforms to EN1757-1.**



KS1015

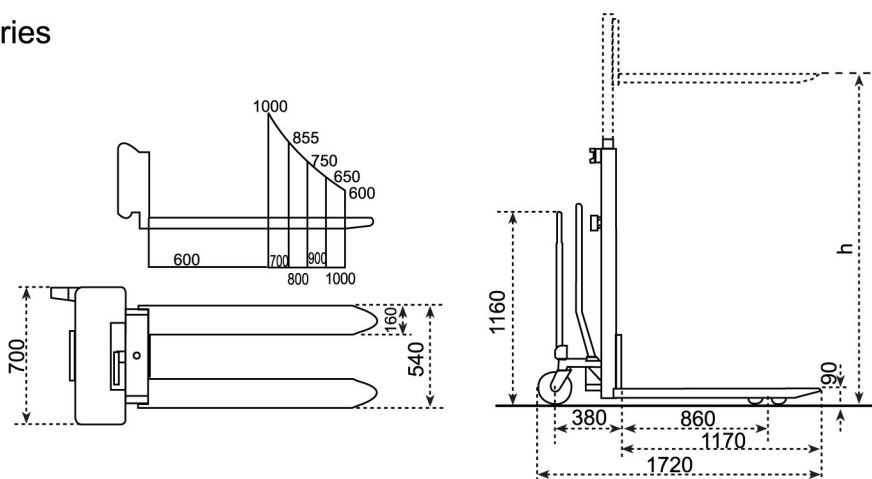

i-Lift No.		1520801	1520803
Model		KS1015	KS1027
Capacity	(kg)(lb.)	1000(2200)	
Lifting Height	h (mm)(in.)	1500(60)	2750(108.3)
Lifting per Stroke	(mm)(in.)	30(1.2)	
Min. Fork Height	(mm)(in.)	90(3.5)	
Fork Length	(mm)(in.)	1150(45.3)	
Fork overall Width	(mm)(in.)	540(21.3)	
Load Wheel	(mm)(in.)	Φ78×80(3x3.1) nylon	
Steering Wheel	(mm)(in.)	Φ150×55(6x2.2) nylon	
Overall Size	LxWxH (mm)(in.)	1600x700x1950 (63x27.6x76.8)	1600x700x1700 (63x27.6x66.9)
Net Weight	(kg)(lb.)	240(528)	270(594)