

Electric Hoist HH series

- Upper and Lower limit device
- Anti-reverse winding device
- Emergency stop switch
- Thermal protection terminal
- Protection class IP54




HH200D


i-Lift No.	2212401		2212402		2212403		2212404		2212405		2212406	
Model	HH200D		HH250D		HH300D		HH400D		HH500D		HH600D	
No. of wire	Single	Double	Single	Double	Single	Double	Single	Double	Single	Double	Single	Double
Use of Hook Rated Voltage	230V/50Hz											
Input Power (W)	510				600		980		1020		1200	
Lifting Cap. kg(lb.)	100(220)	200(440)	125(275)	250(550)	150(330)	300(660)	200(440)	400(880)	250(550)	500(1100)	300(660)	600(1320)
Lifting Speed mm(in.)/min	8000 (315)	4000 (157.5)	8000 (315)	4000 (157.5)	8000 (315)	4000 (157.5)	8000 (315)	4000 (157.5)	8000 (315)	4000 (157.5)	8000 (315)	4000 (157.5)
Lifting Height mm(in.)	12000 (472.4)	6000 (236.2)	12000 (472.4)	6000 (236.2)	12000 (472.4)	6000 (236.2)	12000 (472.4)	6000 (236.2)	12000 (472.4)	6000 (236.2)	12000 (472.4)	6000 (236.2)
N.W. kg(lb.)	13(28.6)		13.5(29.7)		14(30.8)		18.5(40.7)		19(41.8)		20(44)	

Beam Clamp IYC series

- ▲ Provides a quick and versatile rigging point for hoisting equipment, pulley blocks or loads.
- ▲ Flexible application due to wide adjustment range.
- ▲ The central threaded spindle allows easy attachment and a safe and secure grip.
- ▲ The spindle can be secured against loosening.
- ▲ Option: Small dimensions for applications at beams with a low base height.

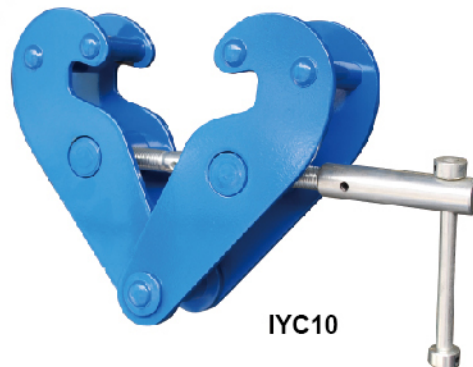

IYC10

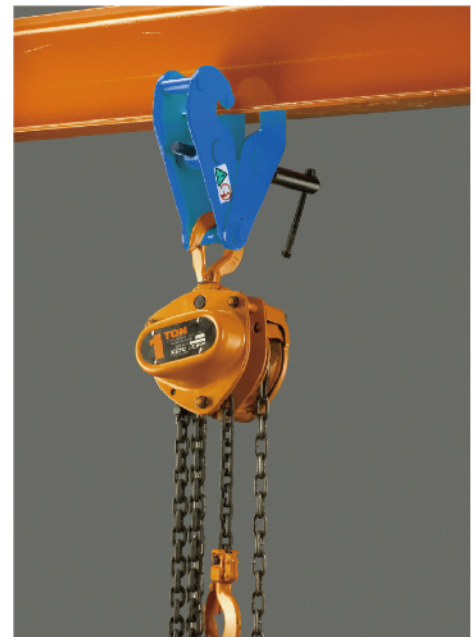

i-Lift No.		3312374	3312375	3312376	3312377	3312378
Model		IYC10	IYC20	IYC30	IYC50	IYC100
WLL	kg(lb.)	1000(2200)	2000(4400)	3000(6600)	5000(11000)	10000(22000)
Jaw Opening	mm(in.)	75-220(3-8.7)		80-320(3.1-12.6)		90-320(3.5-12.6)
Weight	kg(lb.)	3.8(8.4)	4.6(10)	9(19.8)	11(24.2)	16(35.2)