


Hydraulic Lifting Crane HLC series

- ▲ HLC550E is a heavy-duty, extremely versatile counterbalanced workshop crane (built-in ballast weights), with a 360° pivoting arm, suitable for lifting loads up to 550 kg.
- ▲ Fitted with traction battery and battery charger.
- ▲ Equipped with a 4-function hydraulic distributor that allows for adjustable and smooth jib lifting, lowering, extension and retraction.
- ▲ In case of fragile loads or awkward placements, lowering speed can be reduced through a knob.
- ▲ Lifting system is fitted with a security valve that prevents overloading and eliminates the risk of machine overturning in every position of its 360° rotation.



HLC550E

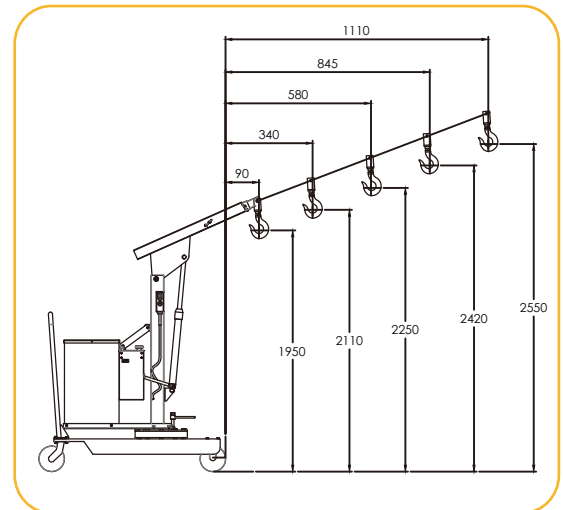

HLC550E

i-Lift No.		2440201					2440202				
Model		HLC550					HLC550E				
Hoist lifting method		Manual hydraulic					Electric Lifting				
Max. load per gear	kg(lb.)	550(1210)	450(990)	350(770)	250(550)	150(330)	550(1210)	450(990)	350(770)	250(550)	150(330)
Max. hook height per gear	mm(in.)	1900(74.8)	2160(85)	2260(89)	2450(96.5)	2600(102.4)	1960(74.8)	2110(83)	2250(88.5)	2420(95.3)	2550(100.4)
Hook to front distance per gear when the hook highest	mm(in.)	115(4.5)	280(11)	570(22.4)	790(31.1)	1002(40)	90(3.5)	340(13.4)	580(22.8)	845(33.3)	1110(43.7)
Hook height when the hoist arm in a horizontal state	mm(in.)	1540(60.6)					1540(60.6)				
Hook to front distance when the hoist arm in a horizontal state	mm(in.)	370(14.6)	660(26)	953(37.5)	1243(48.9)	1530(60.2)	370(14.6)	660(26)	953(37.5)	1243(48.9)	1530(60.2)
Body size: L×W×H	mm(in.)	1400x985x1600(55x38.8x63)					1400x985x1600(55x38.8x63)				
Caster diameter	mm(in)	Φ200(8)					Φ200(8)				
Net weight	kg(lb.)	612(1346.4)					662(1456.4)				
Battery	V/Ah	-					12/80				
Charger	V/A	-					12/8				