

## Dual Direction Pallet Truck HPF series

- ▲ Unique 4-directional movement capacity provides the flexibility to maneuver wide loads through standard aisles.
- ▲ An additional set of wheels allows pallet truck to be moved sideways in addition to conventional forward and backward directions.
- ▲ Move heavy loads, quickly and effortlessly, with convenient hydraulic power and industrial quality features.
- ▲ Include sealed ball bearings on wheels that are permanently lubed and polyurethane coated.
- ▲ Handle has a cushion grip with a 3-position lever.



Capacity: 2000kg at fork height from 85 to 175mm.  
1200kg at fork height from 185 to 205mm.




HPF12S

Extra support  
legs for  
more stable moving.


i-Lift No.		1111103	1111104
Model		HPF12S	HPF12L
Capacity	kg(lb.)	2000/1200(4400/2640)	
Max. Fork Height	mm(in.)	205(8.1)	
Min. Fork Height	mm(in.)	85(3.3)	
Fork Length	mm(in.)	1150(45.3)	1220(48)
Width Overall Forks	mm(in.)	540(21.3)	680(27)
Rear Wheel	mm(in.)	Φ200(8)	
Net Weight	kg(lb.)	75(165)	78(171.6)

## Roll Pallet Truck HR series

- ▲ **Conforms to EN1757-2.**

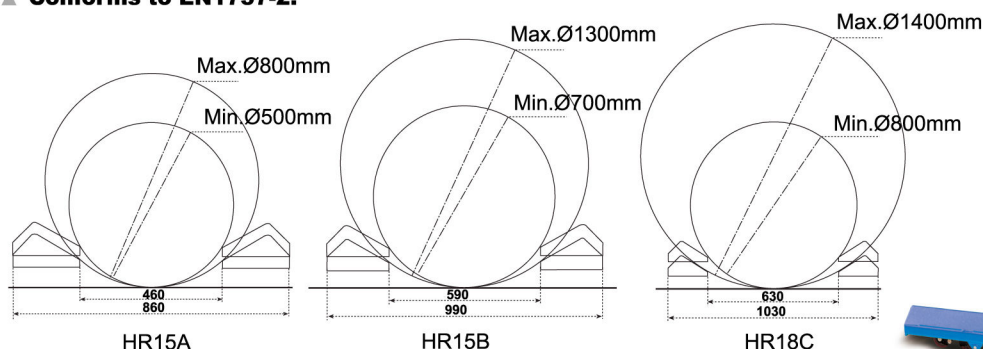

**For handling roll of paper, carpet, textile or other materials.**

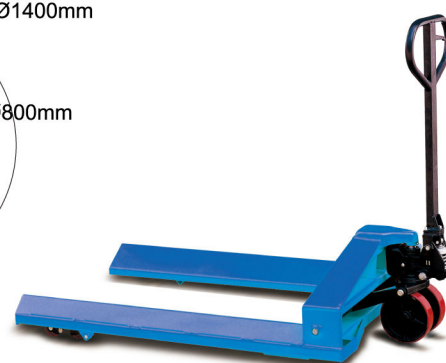

HR15B



i-Lift No.		1111201	1111202	1111203
Model		HR15A	HR15B	HR18C
Capacity	kg(lb.)	1500(3300)		1800(3960)
Min. Roll Diameter	mm(in.)	Φ500(20)	Φ700(27.6)	Φ800(31.5)
Max. Roll Diameter	mm(in.)	Φ800(31.5)	Φ1300(51.2)	Φ1400(55.1)
Max. Roll Length	mm(in.)	1500(60)		
Fork Overall Width	mm(in.)	860(33.9)	990(39)	1030(40.6)
Fork Length	mm(in.)	1350(53.1)		
Rear Wheel	mm(in.)	Φ200(8)		
Net Weight	kg(lb.)	130(286)	140(308)	155(341)