


Stationary Foot Pump Scissor Table FBX series

- ▲ Heavy duty range
- ▲ New design to meet norm EN1570:1999.
- ▲ Foot operated.

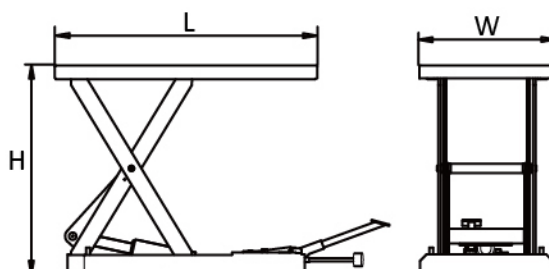

FBX50

i-lift No.		1313701	1313702	1313703	1313704	1313705	1313706	1313707
Model		FBX15	FBX20	FBX25	FBX30D	FBX50	FBX80	FBX100
Capacity	kg(lbs)	150(330)	200(440)	250(550)	300(660)	500(1100)	800(1760)	1000(2200)
Table Size	LxW	mm(inch)	700x450 (27.6x17.7)	700x500 (27.6x20)	830x500 (32.7x20)	1010x520 (40x20.5)		
Table Height	H(Min./Max.)	mm(inch)	127/533(5/21)	150/711(6/28)		240/1375(9.4/54)	150/800(6/31.5)	160/800(6.3/31.5)
Overall Size		mm(inch)	730x450 (28.7x17.7)	730x500 (28.7x20)	850x500 (33.5x20)	1030x520 (40.6x20.5)		
Foot Pedal to Max. Height			30	40	47	55	70	80

Low Profile Lift Table HX series

- ▲ Heavy duty design with larger platform.
- ▲ These tables achieve a low closed height, eliminating the need for a pit installation.
- ▲ They are manufactured to all European safety standards including EN1570:1999.
- ▲ Remote power pack with pedestal and controls, IP54 protection.
- ▲ Upper platform fitted with safety perimeter to prevent descent on contact with obstructions.
- ▲ 24V control box with UP and DOWN buttons and emergency stop.
- ▲ External power pack equipped with a relief valve against overloading and a compensated flow valve for controlling lowering speed. Power supply are AC 380V/50HZ/3phase.
- ▲ Hose burst safety valve to stop the lift table lowering in case of hose breakage.
- ▲ Removable lifting eyes to facilitate handling and installation of the lift table.
- ▲ Oil-less bushings on pivot points.
- ▲ Loading ramp is a standard equipment.



HX500

i-Lift No.		1313401	1313402	1313403
Model		HX500	HX1000	HX1500
Capacity	kg(lb.)	500(1100)	1000(2200)	1500(3300)
Platform Size	LxW(mm)(in.)	1270x1100(50x44)		
Min. Height	(mm)(in.)	25(1)	35(1.4)	
Max. Height	(mm)(in.)	800(31.5)		
Stroke	(mm)(in.)	775(30.5)	765(30.1)	
Lifting Time	(second)	25-30		
Power Pack		380V/50HZ		
Net Weight	(kg)(lb.)	315(693)	395(869)	470(1034)