



Mini Winch Stacker LS series

- ▲ Robust, lightweight, steel construction.
- ▲ Maneuverable, extremely easy to use.
- ▲ Cable winch lifting system with fully cable housing.
- ▲ Adjustable fork from 132mm to 520mm.
- ▲ Platform is a standard accessory.

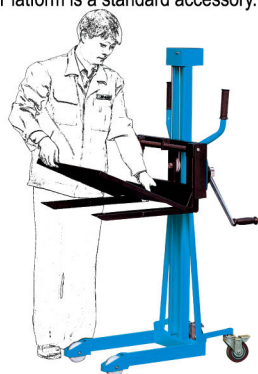

Platform is a
standard
accessory

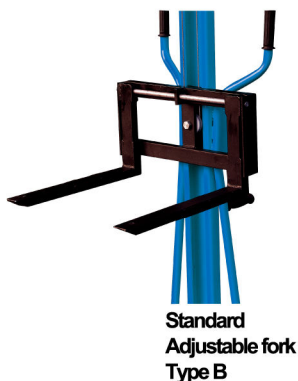

Standard
Adjustable fork
Type B



New adjustable
fork as option
Type A



LS80

i-Lift No.		1520101	1520102
Model		LS80	LS150
Capacity	(kg) (lb.)	80(176)	150(330)
Load Centre	(mm) (in.)		250(10)
Lifting Height	(mm) (in.)		1100(44)
Straddle Leg Height	(mm) (in.)		85(3.3)
Min. Fork Height	(mm) (in.)		70(2.8)
Fork Length	(mm) (in.)		500(20)
Individual Fork Width	(mm) (in.)		50(2)
Platform Size	(mm) (in.)	500x530x90(20x20.8x3.5)	
OverAdjustable Fork Width	(mm) (in.)	132-520(5.2-20.5)	
Effort Force with Load	(N)	82	106
Load Wheel	(mm) (in.)	Ø100x30(4x1.2)	
Steering Wheel	(mm) (in.)	Ø100x30(4x1.2)	
Overall Dimensions	(mm) (in.)	865x550x1470(34x22x58) 830x580x1475(32.7x22.8x58)	
Net Weight	(kg) (lb.)	52(114.4)	62(136.4)

Important: Forks MUST be in Max. fork width position when fit platform on two forks.

Mini Stacker PM

- ▲ Lightweight design, very easy to operate by hand winch.
- ▲ Suitable for super market, office, warehouse, narrow area, etc.
- ▲ Adjustable fork.

i-Lift No.		1520201
Model		PM120
Capacity	(kg) (lb.)	120(264)
Lifting Height	(mm) (in.)	1050(41.3)
Min. Fork Height	(mm) (in.)	95(3.7)
Fork Length	(mm) (in.)	400(15.7)
Individual Fork Width	(mm) (in.)	50(2)
Fork Width	(mm) (in.)	adjustable 345-485(9.6-19.1)
Load Wheel	(mm) (in.)	Ø50x20(2x0.8)
Steering Wheel	(mm) (in.)	Ø200/50-140(4x2-5.5)
Net Weight	(kg) (lb.)	31(68.2)



PM120