


Lever Hoist LWR series

- ▲ Top quality range.
- ▲ Capacity from 0.75 to 6 tonne.
- ▲ Easy for operating.
- ▲ Designed and built for most industrial lifting, pulling application.
- ▲ **Conforms to CE safety standard.**



LWR75-5

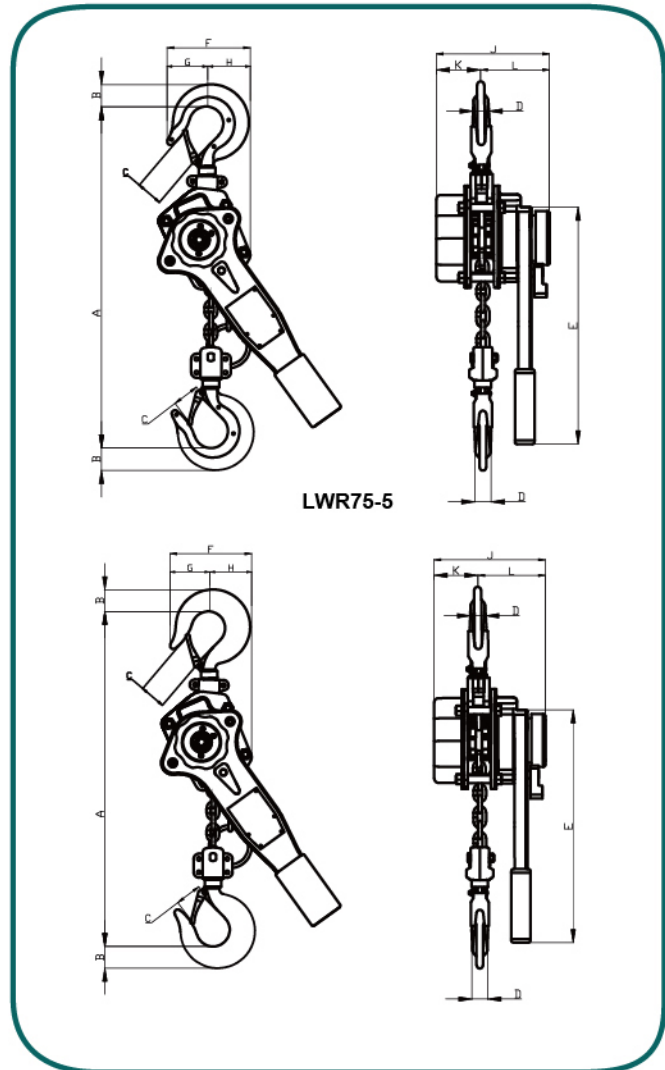

i-lift No.		2212401	2212402	2212403	2212404	2212405	2212406	2212407	2212408	2212409	2212410	2212411	2212412	
Model		LWR75-5	LWR100-5	LWR150-5	LWR200-5	LWR300-5	LWR600-5	LWR75-10	LWR100-10	LWR150-10	LWR200-10	LWR300-10	LWR600-10	
Rated Capacity	kg(lb.)	750(1650)	1000(2200)	1500(3300)	2000(4400)	3000(6600)	6000(13200)	750(1650)	1000(2200)	1500(3300)	2000(4400)	3000(6600)	6000(13200)	
Standard Lifting Height	mm(in.)/foot	1500(60)/5												
Effort to Rated Capacity	(N)	150	160	230	250	350	370	150	160	230	250	350	370	
Dia. of Load Chain	mm(in.)	Φ6x18(0.2x0.7)		Φ8x24(0.4x1)		Φ10x30(0.4x1.2)		Φ6x18(0.2x0.7)		Φ8x24(0.4x1)		Φ10x30(0.4x1.2)		
Net Weight	kg(lb.)	7.6(16.7)	7.8(17.2)	11.5(25.3)	13.1(28.8)	21.3(46.8)	32(70.4)	7.5(16.5)	7.7(16.9)	11.5(25.3)	12.8(28.2)	21(46.2)	31.5(69.3)	
Dimensions	mm(in.)	A	320(12.6)	328(12.9)	380(15)	385(15.2)	475(18.7)	495(19.5)	320(12.6)	328(12.9)	380(15)	385(15.2)	475(18.7)	495(19.5)
		B	25(1)	30(1.2)	32(1.3)	33(1.3)	40(1.6)	50(2)	25(1)		33(1.3)	40(1.6)	50(2)	
		C	25(1)	30(1.2)	32(1.3)	38(1.5)	40(1.6)	45(1.8)	25(1)		35(1.4)	38(1.5)	52(2.1)	
		D	18(0.7)	20(0.8)	25(1)	29(1.1)	32(1.3)	40(1.6)	18(0.7)		20(0.8)	22(0.9)	26(1.1)	33(1.3)
		E	330(13)		460(18.1)				330(13)		460(18.1)			
		F	135(5.3)		160(6.3)		211(8.3)	254(10)	135(5.3)		162(6.3)		211(8.3)	254(10)
		G	40(1.6)	45(1.8)	52(2)	58(2.3)	65(2.6)	80(3.1)	37(1.4)	38(1.5)	45(1.8)	47(1.9)	60(2.3)	80(3.1)
		H	58(2.3)	62(2.4)	65(2.5)	83(3.3)	75(3)	80(3.1)	58(2.3)	62(2.4)	65(2.5)	83(3.2)	75(2.9)	80(3.1)
		J	148(5.8)		175(6.9)		195(7.7)		148(5.8)		175(6.9)		195(7.7)	
		K	60(2.4)		70(2.8)		85(3.3)		60(2.4)		70(2.8)		85(3.3)	
		88(3.5)		102(4)		109(4.3)		88(3.5)		102(4)		109(4.3)		