

Accessories for i-Lift Work Positioner


- ▲ All these optional standard accessories are available in various special versions.
- ▲ E type is also available in an AISI 304 stainless steel version for use in sterilised areas or food sectors.




M100R / M200R




E100R / E150R

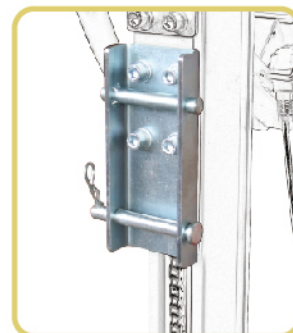


OPTION: QUICK RELEASE

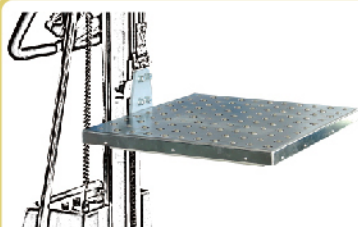


Ball Transfer unit.
Model no. EP01

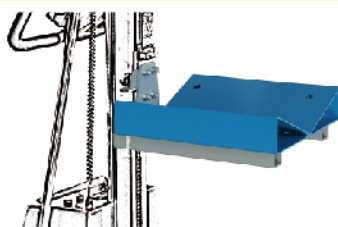


V Block
Model no. EP03

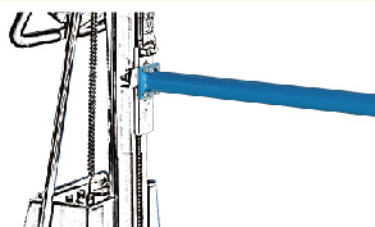

Single Spindle
Model no. EP05

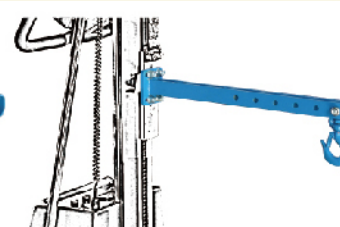


Fork with Hook
Model no. EP07

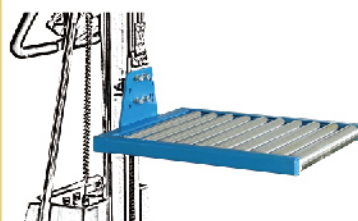


Roller Platform
Model no. EP02



Reel Rotator
Model no. EP04

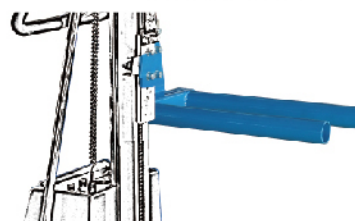

Double Spindle
Model no. EP06

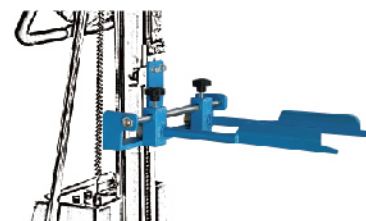

Bin Clamp
Model no. EP08

i-Lift No.		1551507	1551508	1551509	1551510	1551505	1551506	1551511
Model		M100R	M200R	E100R	E150R	E180N-1/E180N-2	E250N	E300N
Type		Manual			Electric			
Capacity	kg(lb.)	100(220)	200(440)	100(220)	150(330)	180(396)	250(550)	300(660)
Load Centre	mm(in.)	235(9.3)				200(8)		
Max. Fork Height	mm(in.)	1500(60)		1700(67)	1500(60)	1600(63)/1900(75)	1900(75)	1900(75)
Min. Fork Height	mm(in.)	130(5.1)						
Platform Size	mm(in.)	470x600(18.5x23.6)					480x610(18.9x24)	470x600(18.5x23.6)
Overall Size	mm(in.)	840x600x1830 (33.1x23.6x72)	870x600x1920 (34.3x23.6x75.5)	870x600x1990 (34.3x23.6x78.3)	870x600x1790 (34.3x23.6x70.5)	870x740x1920(2220)(33.5x29.1x75.5(86.6))		
Load Wheel	mm(in.)	Φ75(3)						
Steering Wheel	mm(in.)	Φ125(5)						
Battery, Service Free		—		24V/12Ah		24V/20Ah		
Net Weight	kg(lb.)	50(110)	60(132)	66(145.2)	63(138.6)	85(187)	90(198)	105(231)