


Hand Pallet Truck MP series



- ▲ Rubber coated handle comfortable even under extreme temperature conditions.
- ▲ Fully sealed hydraulic unit housing.
- ▲ Single valve cartridge for easy maintenance.
- ▲ Powder coated chassis made of high grade steel.
- ▲ Entry rollers reduce damage to pallets.
- ▲ **Conforms to EN1757-2.**




One valve cartridge



Two nylon entry and exit rollers

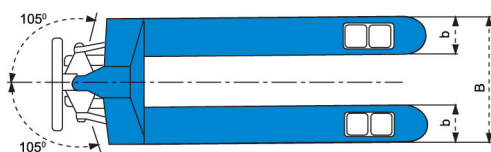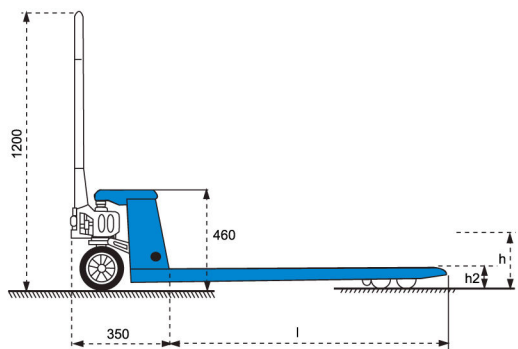

(mm)

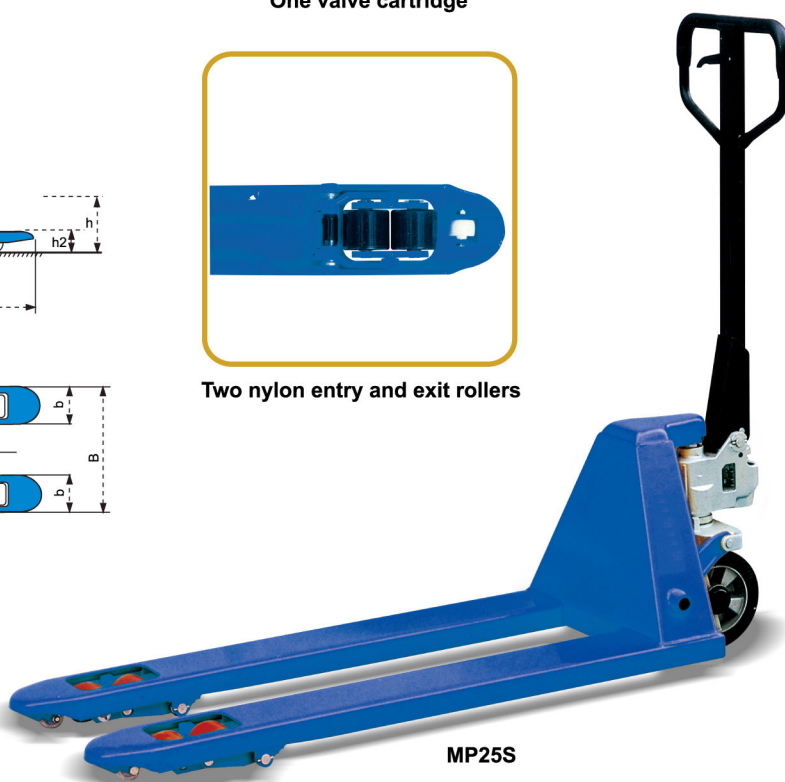

MP25S

i-Lift No.		1120101	1120102	1120103	1120104	1120105	1120106
Model		MP20S	MP20L	MP25S	MP25L	MP30S	MP30L
Capacity	kg(lbs)	2000(4400)		2500(5500)		3000(6600)	
Lifting Height	mm(inch)	115(4.5)					
Max. Fork Height	h (mm)(inch)	200 or 190 (7.9 or 7.5)					
Min. Fork Height	h2 (mm)(inch)	85 or 75 (3.3 or 3)					
Fork Length	l (mm)(inch)	1150(45.3)	1220(48)	1150(45.3)	1220(48)	1150(45.3)	1220(48)
Fork Width	b (mm)(inch)	160(6.3)					
Width Overall Forks	B (mm)(inch)	540(21.3)	685(27)	540(21.3)	685(27)	540(21.3)	685(27)
Load Roller	(mm)(inch)	Tandem Φ80×70 (Φ3.2×2.4), Single Φ80×93 (Φ3.2×3.7) Nylon, Polyurethane					
Steering Wheel	(mm)(inch)	Φ200×50 (Φ7.9×2) Nylon, Polyurethane or Rubber					
Net Weight	kg(lbs)	80(176)	83(182.6)	82(180.4)	85(187)	85(187)	87(191.4)

Note: Special fork size available.