


Hand Stacker PA series

- ▲ Latest technology in hydraulic pump requiring less operating force. Top quality German seal kit.
- ▲ Heavy duty 1 piece "C" section forks for greatest strength.
- ▲ Optional adjustable forks for wider applications.
- ▲ Economic and reliable.
- ▲ **Conforms to EN1757-1.**

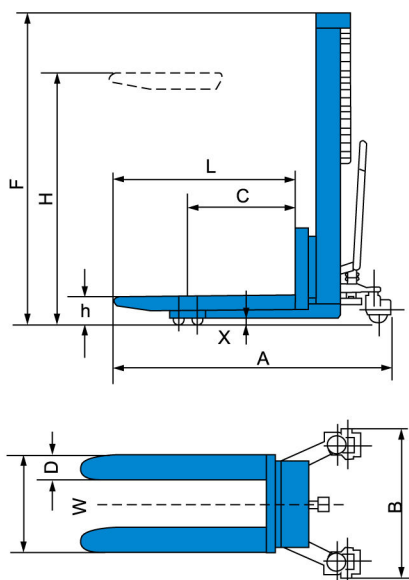

PA1015

i-Lift No.		1520401	1520402	1520403	1520404	1520405
Model		PA0515	PA1015	PA1025	PA1515	PA2015
Capacity	(kg) (lb.)	500(1100)	1000(2200)	1000(2200)	1500(3300)	2000(4400)
Load Centre	C (mm) (in.)			585(23)		
Max. Fork Height	H (mm) (in.)	1500(60)	1500(60)	2500(100)	1500(60)	1500(60)
Min. Fork Height	h (mm) (in.)			88(3.5)		
Fork Length	L (mm) (in.)			1150(45.3)		
Fork Width	D (mm) (in.)			160(6.3)		
Overall Fork Width	W (mm) (in.)			540(21.3)		
Lifting Height Per Stroke	(mm) (in.)	20(0.8)		12.5(0.5)		10(0.4)
Ground Clearance	X (mm) (in.)			24(0.9)		
Min. turning Radius (outside)	(mm) (in.)		1086(42.8)		1100(43.3)	1100(43.3)
Front Load Roller	(mm) (in.)			Φ80×70(3x2.8)		
Steering Wheel	(mm) (in.)	Φ150×40(6x1.6)	Φ150×50(6x2)	Φ150×50(6x2)	Φ180×50(7x2)	Φ180×50(7x2)
Overall Length	A (mm) (in.)	1604(63.1)	1604(63.1)	1646(64.8)	1665(65.5)	1695(66.7)
Overall Width	B (mm) (in.)	794(31.3)	760(30)	760(30)	720(28.3)	720(28.3)
Overall Height	F (mm) (in.)	2010(79.1)	2010(79.1)	1890(74.4)	2010(79.1)	2010(79.1)
Net Weight	(kg) (lb.)	210(462)	220(484)	330(726)	250(550)	280(61.6)

Option adjustable fork available: 346-710mm fork width on PA series.

Note: Materials and specification are subject to change without notice.