




Quick Airbag Loader QAL series

- ▲ Works with loads from 220 4,400 lbs.
- ▲ Automatically positions loads between 10.4" and 28"
- Requires no electrical power
- Can be disconnected from shop air or compressor once airbag is inflated
- Small base allows workers to stand up close to the QAL1000 at any position
- Stable design requires no floor lagging
- ▲ Built-in fork pockets facilitate relocation to multiple work areas
- Easily move to any location with optional table mover without forklift.




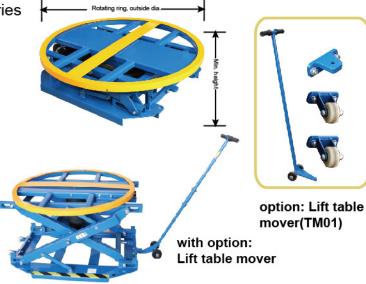

i-lift No.		1313604
Model		QAL1000
Capacity	kg(lb.)	2000(4400)
Capacity Range Min.	kg(lb.)	200(440)
Capacity Range Max.	kg(lb.)	1050(2310)
Compressed height	mm(in.)	265(10.4)
Extended height	mm(in.)	710(28)
Rotating ring, outside dia.	mm(in.)	1110(44)
Base Frame length	mm(in.)	1220(48)
Base Frame width	mm(in.)	930(36.6)
Net Weight	kg(lb.)	192(422.4)
Min. air pressure	psi	6
Max. air pressure	psi	15

Stationary lift table with carousel turntable

HRL series



Improve employee safety by accurately lifting loads to a comfortable working height.

A Help to increase productivity while helping to reduce injuries due to bending and reaching.

A Hand or foot control for option.

This model can be used in above-floor or in-floor pit applications.

i-lift No.			1313605	1313606
Model			HRL1000	HRL2000
Capacity		kg(lb.)	1000(2200)	2000(4400)
Min. height		mm(in.)	330(13)	
Max. heigh	t	mm(in.)	710(28)	
Rotating ring, outside dia. mm(in.)		1110(44)		
Base Frame length mm(mm(in.)	930(36.6)	
Base Fram	e width	mm(in.)	920(36.2)	
Net Weight		kg(lb.)	208(457.6)	217(477.4)
Power Pac	k		380V/1.1kw	380V/2.2kw
Option	Lifting I	Mode	Hand Contro	ol/Foot Control
	Rotatin	g Mode	Hand/Electric	



option: hand control



with foot control