

Electric Tow tractor SM series


- ▲ Compact Design, extremely maneuverable, easy operation.
- ▲ Pulling trolley, baggage carts.
- ▲ Standard manual hook & Electric hook for model SM1000D.



SM1000N



SM1000D

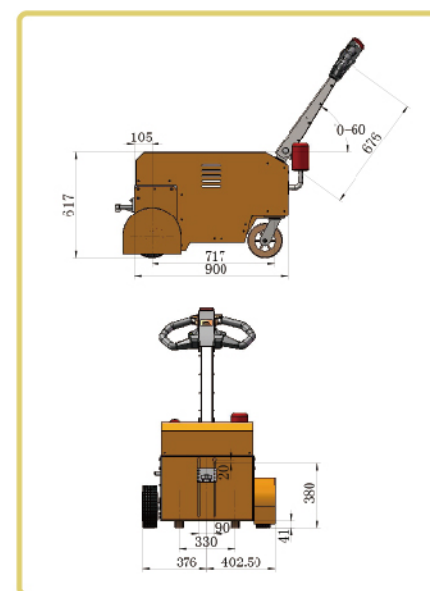

SM3500


NEW



SM1000B(S)



SM6000

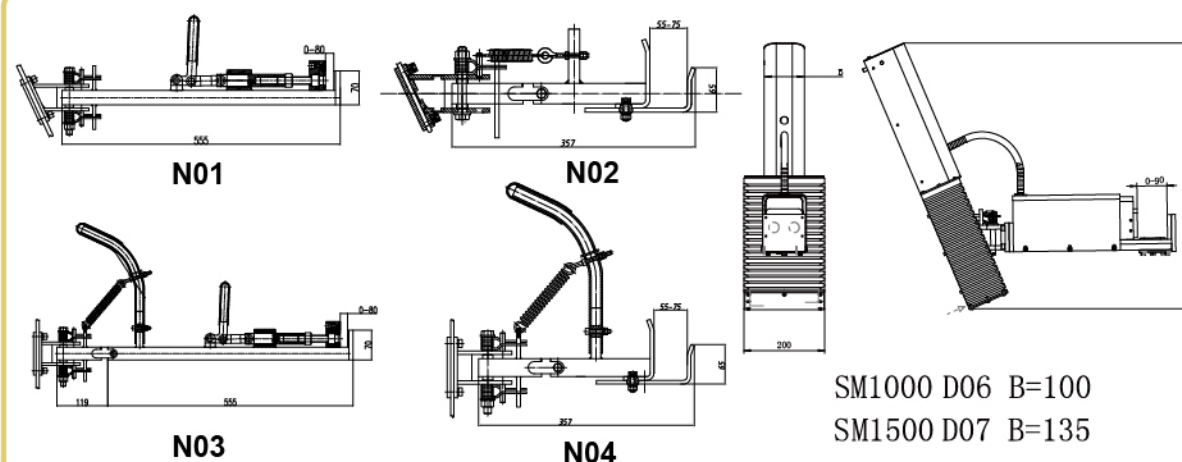

SM1000 D06 B=100
SM1500 D07 B=135

i-Lift No.		1810901	1810910	1810902	1810903	1810904	1810905	1810906
Model		SM1000N	SM1000B(S)	SM1500N	SM2000N	SM1000D	SM1500D	SM2000D
Capacity	kg	1000		1500	2000	1000	1500	2000
Tires		Solid Rubber						
Universal wheel		Polyurethane(PU)						
Tire size, front	mm	250						
Tire size, rear	mm	75						
Height of tilter in drive position min./max.	mm	850-1200						
Overall length without hook	mm	575	620	700	700	575	700	700
Overall width	mm	510	500	552	552	510	552	552
Ground clearance	mm	40	30	40				
Travel speed slow/fast	km/h	1.2-2/3-3.5						
Service brake		Electromagnetic						
Drive motor	kw	0.4		0.5	0.6	0.4	0.5	0.6
Battery	Ah/V	20/24		38/24	45/24	20/24	38/24	45/24
Charger	A/V	3/24		5/24		3/24	5/24	
Type of drive control		DC Curtis Control						
Sound level at driver's ear acc. To EN	db(A)	<70						
N.W.	kg	91	85	190	210	95	217	237
Hook type		Manual				Electric		
Hook Model		N01/02		N03/04		D06	D07	
Hook Height	mm	220-300/210-290				200-300		

i-Lift No.		1810907	1810908	1810909
Model		SM3000	SM3500	SM6000
Capacity	kg	3000	3500	6000
Tires		Solid Rubber		
Universal wheel		Polyurethane(PU)		
Tire size, front	mm	250		320
Tire size, rear	mm	200		
Height of tilter in drive position min./max.	mm	850-1200		
Overall length without hook	mm	1045		
Overall width	mm	800		960
Ground clearance	mm	90		
Travel speed slow/fast	km/h	1.2-2/3-3.5		
Service brake		Electromagnetic		
Drive motor	kw	1.2	1.5	2.2
Battery	Ah/V	80/24		100/24
Charger	A/V	10/24		
Type of drive control		DC Curtis Control		
Sound level at driver's ear acc. To EN	db(A)	<70		
N.W.	kg	330	360	450
Hook type		Manual or Hydraulic		
Hook clamping height	mm	180-420		