

Hand Pallet Truck SP series

Heavy duty design-Top quality pump !

▲ Durable Hydraulic pump

With latest European technology, self-contained unit provides premium-quality hydraulic, seal kits are made in Germany.

▲ Central Fingertip Controls

Three-position control lever provides fingertip control of all hydraulic system functions with the handle in any position.

Neutral position frees handle of hydraulic functions.


▲ Fork Frame

Rugged construction with heavy gauge steel and sturdy continuous welds throughout, fork frame can load 3000kg.

▲ Conforms to EN1757-2.



SP25S

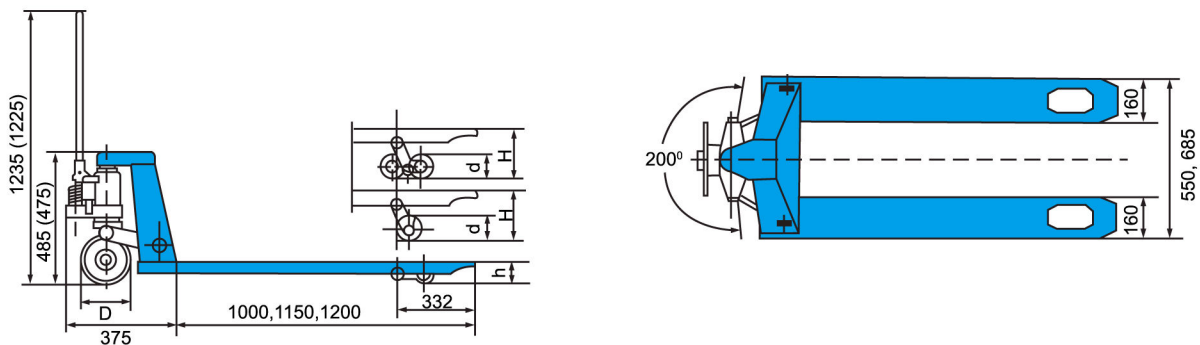

(mm)

i-Lift No.	1120201	1120202	1120203	1120204	1120205	1120206
Model	SP20S	SP20L	SP25S	SP25L	SP30S	SP30L
Capacity	kg(lb.) 2000(4400)		2500(5500)		3000(6600)	
Max. lifting height H (mm)(in.)	200 or 190 (7.9 or 7.5)					
Min. lowering height h (mm)(in.)	85 or 75 (3.3 or 3)					
Fork Length (mm)(in.)	1150(45.3)	1220(48)	1150(45.3)	1220(48)	1150(45.3)	1220(48)
Fork Width (mm)(in.)	550(21.7)	685(27)	550(21.7)	685(27)	550(21.7)	685(27)
Load roller	single d (mm)(in.) Φ80x93 or Φ74x93 (Φ3.1×3.7 or Φ2.9×3.7)					
	tandem d (mm)(in.) Φ80x70 or Φ74x70 (Φ3.1×2.8 or Φ2.9×2.8)					
Steering wheel D (mm)(in.)	Φ200x50 or Φ180x50 (Φ7.9×2 or Φ7.1×2)					
Net Weight (kg)(lb.)	68-75(150-165)	73-80(160-176)	71-78(156-172)	74-82(163-180)	78-83(172-183)	81-86(178-189)

Note: Special fork size available.