



Skid Lifter SL/PL / PE/PEL series

Easier handling to minimize back strain.
Better feature - it can move when raised.

- ▲ Combination of pallet truck and lift table.
- ▲ Ideal for your loading and unloading operations.
- ▲ Continuous-welded heavy steel frame and forks handle weighty loads with ease.
- ▲ Easy-to-use control lever plus two parking brakes on steering wheels increase safety.
- ▲ Reliable power unit for easier and faster lifting.
- ▲ Additional steering handle on 1000kg models for easier and comfortable turning.
- ▲ **Conforms to EN1757-4 and EN1175(For Electric).**

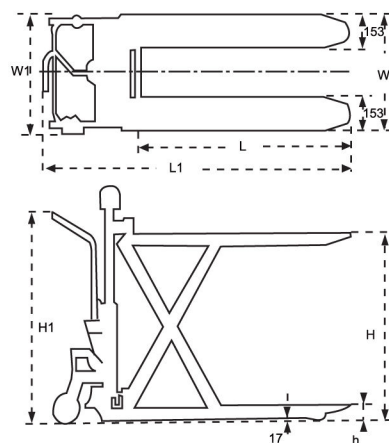


SL50S

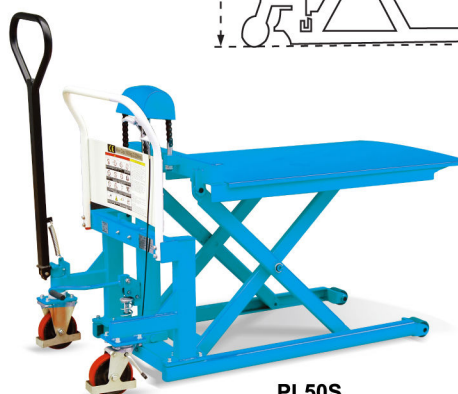

PL50S



PE50S

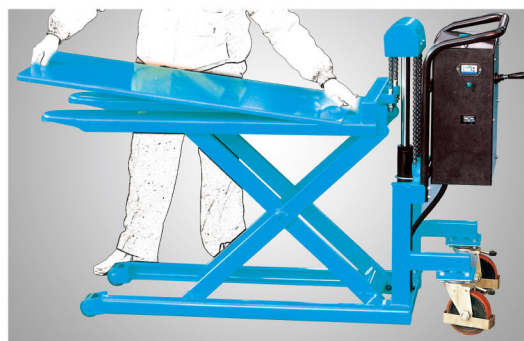

PEL50S

i-Lift No.	1410901	1410902	1410903	1410904	1410905	1410906	1410907	1410908	1411001	1411002	1411003	1411004	1411005	1411006	1411007	1411008		
Model	SL50S	SL50L	SL100S	SL100L	PL50S	PL50L	PL100S	PL100L	PE50S	PE50L	PE100S	PE100L	PEL50S	PEL50L	PEL100S	PEL100L		
Type	Manual								Electric									
Platform	--				with platform				--				with platform					
Capacity	kg(lb.)		500(1100)		1000(2200)		500(1100)		1000(2200)		500(1100)		1000(2200)		500(1100)		1000(2200)	
Load Center	mm(in.)		560(22)															
Max. Fork Height	H mm(in.)		830(32.7)				833(32.8)				830(32.7)				833(32.8)			
Min. Fork Height	h mm(in.)		85(3.3)				188(3.5)				85(3.3)				88(3.5)			
Fork/Platform Length	L mm(in.)		1115(43.9)															
Fork/Platform Width	W mm(in.)		526(20.7)	690(27.2)	526(20.7)	690(27.2)	538(21.2)	703(27.7)	538(21.2)	703(27.7)	526(20.7)	690(27.2)	526(20.7)	690(27.2)	538(21.2)	703(27.7)	538(21.2)	703(27.7)
Overall Width	W1 mm(in.)		526(20.7)	691(27.2)	687(27)	852(33.5)	538(21.2)	703(27.7)	693(27.3)	858(33.8)	580(22.8)	740(29.1)	550(1.7)	720(28.3)	586(23.1)	752(29.6)	556(21.9)	726(28.6)
Overall Length	L1 mm(in.)		1550(61)		1640(64.6)		1550(61)		1640(64.6)		1620(63.8)		1740(68.5)		1620(63.8)		1740(68.5)	
Overall Height	H1 mm(in.)		1012(39.8)		1307(51.5)		1012(39.8)		1307(51.5)		1050(41.3)		1307(51.5)		1050(41.3)		1307(51.5)	
Front Roller	mm(in.)		Ø70x68(3x2.7) polyurethane															
Steering Wheel	mm(in)		Ø150x40(6x1.6) polyurethane															
Pump Strokes to Max. Lift	45	45	75	75	45	45	75	75	--									
Power Unit	(KW)		--								1.6							
Battery	(V)		--								12							
Working Cycles	(s)		--								100		80		100		80	
Net Weight	kg(lb.)		107(235.4)	116(255.2)	135(297)	138(303.6)	122(268.4)	136(299.2)	150(330)	158(347.6)	172(378.4)	176(387.2)	174(382.8)	180(396)	180(396)	184(404.8)	182(400.4)	188(413.6)