


# Self-Propelled Aluminium Work Platform (Drive)

## SXP series

- ▲ With the most stable and compact mast in the industry.
- ▲ Available in AC or DC power.
- ▲ Suitable for single person to work upraised.
- ▲ Maximum platform height: 6m and 8m, 10m.
- ▲ Power supply: Single phase AC as standard.  
DC or both AC (optional).



**SXP2075**

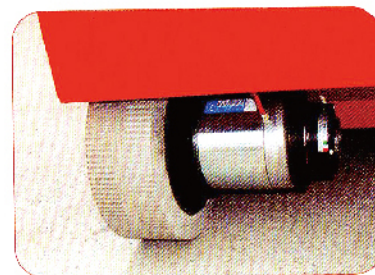

i-Lift No.		2440202	2440203
Model		SXP2075	SXP1590
Capacity	kg(lb.)	200(440)	150(330)
Max.Platform Height	(mm)(in.)	7500(295.3)	9000(354.3)
Max.Working Height	(mm)(in.)	9500(374)	11000(440)
Max.Machine Height	(mm)(in.)	9000(354.3)	10500(413.4)
Min.Platform Height	(mm)(in.)	530(20.8)	
Ground Clearance	(mm)(in.)	70(2.8)	
Platform Size	(mm)(in.)	1000X700X1150(40x27.5x45.3)	
Wheel Base	(mm)(in.)	990(39)	
Max.Driving Speed (Platform stowed)	(km/h)	3.5 ~4	
Max.Driving Speed (Platform raised)	(km/h)	0.6~1	
Min.Turning Radius	(mm)(in.)	1600(63)	
Max.Climbing Capacity	(%)	12~15	
Driving Wheel size	(mm)(in.)	Φ230x80(9x3.1)	
Caster Size	(mm)(in.)	150(6)	
Driving Motor	(V/kW)	2x24/0.4	
Lifting Motor	(V/kW)	24/2.2	
Controller		PG	
Battery	(V/Ah)	2X12/150	
Charger	(V/A)	24/15	
Pothole Protection System		Mechanical Contorl	
Overall Size (LxWxH)	(mm)(in.)	1500x1000x1960(60x40x77.2)	
Net Weight	kg(lb.)	1100(2420)	1250(2750)

