

Powered Pallet Truck TE / TK series

Top Quality Range, Heavy Duty Design

- ▲ Maneuver loads up ramps and dockboards effortlessly.
- ▲ Compact design combines with new technology, making this pallet truck ideal for narrow, cramped aisles. shortest head length in the market permits the best possible maneuverability.
- ▲ Smooth stepless speed control with European technology.
- ▲ Power unit with European technology.
- ▲ Powerful traction battery.
- ▲ Powerful maintenance free AC drive motor.
- ▲ Drive unit with electromagnetic brake.
- ▲ **Conforms to EN1726 and EN1175-1.**



TE20S

Option





TK-B
Side Battery Replacing Design

TK-B



TK20S

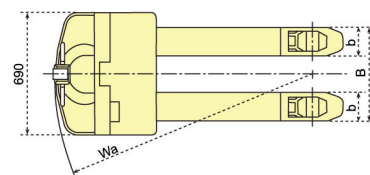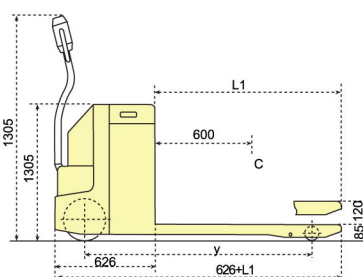

i-Lift No. / Model	1111501 / TE20S	1111502 / TE20L	1111601 / TK20S	1111602 / TK20L
i-Lift No. / Model	1111503 / TE20S AC	1111504 / TE20L AC	1111603 / TK20S AC	1111604 / TK20L AC
Type	without platform		with platform	
Capacity	kg(lb.) 2000(4400)		2000(4400)	
Load Center	C (mm)(in.) 600(23.6)		600(23.6)	
Max. Fork Height	H (mm)(in.) 205(8.1)		205(8.1)	
Min. Fork Height	h (mm)(in.) 85(3.3)		85(3.3)	
Fork Length	L1 (mm)(in.) 1150(45.3)		1150(45.3)	
Individual Fork Width	b (mm)(in.) 160(6.3)		160(6.3)	
Wheel Base	y (mm)(in.) 1406(55.3)		1406(55.3)	
Turning Radius	Wa (mm)(in.) 1608(63.3)		1946(76.6)	
Traveling Speed With/Without Load	(Km/h) 3.6/5.4		3.6/5.4	
Lifting Speed With/Without Load	(mm/s) 22/32		22/32	
Lowering Speed With/Without Load	(mm/s) 50/55		50/55	
Drive Wheel	1200W, Φ250mm (DC)		1200W, Φ250mm (DC)	
Drive Wheel	1200W, Φ250mm (AC)		1200W, Φ250mm (AC)	
Power Unit (lifting motor)	(W/V) 800/24		800/24	
Traction Battery	24V/210Ah, 185kg		24V/210Ah, 185kg	
Battery Charger	25A/24V		25A/24V	
Overall Dimension	L×W×H (mm)(in.) 1781×690×1305(70x27.2x51.4)		2125×690×1305	
Fork Overall Width	B (mm)(in.) 530(20.9)		530(20.9)	680(26.8)
Net Weight	kg(lb.) 324(712.8)		338(743.6)	343(754.6)
Tiller	O		O	O

O = Option

***2.5 / 3T Available