

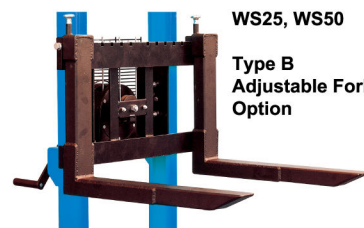
Winch Stacker WS series

- ▲ Compact and service free design.
- ▲ Unique design of winch for easier and safer lifting.
- ▲ Heavy duty "C" section mast.
- ▲ Adjustable fork width from 160mm to 690mm (WS25, WS50).
- ▲ Two parking brakes on steering wheels.
- ▲ **Conforms to EN1757-1:2001.**

WS25, WS50

Type A
Adjustable Fork
Standard

WS25, WS50

Type B
Adjustable Fork
Option

WS50



WS100

i-Lift No.		1520301	1520302	1520303
Model		WS25	WS50	WS100
Capacity	(kg) (lb.)	250 (550)	500 (1100)	1000 (2200)
Load Centre	(mm) (in.)	400 (15.7)	500 (20)	575 (22.6)
Max. Fork Height	(mm) (in.)	1560 (61.5)		1500 (60)
Lowered Fork Height	(mm) (in.)	90 (3.5)		88 (3.5)
Fork Adjustable Width	(mm) (in.)	150-690 (6-27.2)		Fixed 540 (21.3)
Fork Length	(mm) (in.)	800 (31.5)	1000 (40)	1150 (45.3)
Fork Width	(mm) (in.)	60 (2.4)	70 (2.8)	160 (6.3)
Effort Force to Rated Load	(N)	100	120	100
Lifting Height per Stroke	(mm) (in.)	40 (1.6)	22 (0.7)	9.5 (0.4)
Ground Clearance	(mm) (in.)	18 (0.7)		24 (0.9)
Min. Turning Radius (outside)	(mm) (in.)	1075 (42.3)		1250 (49.2)
Front Load Roller	(mm) (in.)	Ø80x47 (3.1x2.9)		Ø80x94 (3.1x3.7)
Steering Wheel	(mm) (in.)	Ø150x40 (6x1.6)		Ø150x50 (6x2)
Overall Size (LxWxH)	(mm) (in.)	1325x725x2030 (52.2x28x80)		1600x725x1930
Net Weight	(kg) (lb.)	140 (308)	146 (321.2)	182 (400)

Single Mast Stacker SU

- ▲ Designed for heavy-duty, intensive and commercial use;
- ▲ Ergonomically designed handle for simple and comfortable operation;
- ▲ Single mast without view-obstructing components;
- ▲ Easy to operate with quick-lift function;
- ▲ Forced synchronous steering on two steering wheels;
- ▲ Quick lifting type is available.
- ▲ **Conforms to EN1757-1.**

i-Lift No.		1530101
Model		SU1017
Capacity	(kg) (lb.)	1000(2200)
Max. Fork Height	(mm) (in.)	1700 (67)
Min. Fork Height	(mm) (in.)	88 (3.5)
Fork Length	(mm) (in.)	1150(45.3)
Fork Width	(mm) (in.)	540(21.3)
Net Weight	(kg) (lb.)	245 (539)
Wheel Type		polyurethane
Oversize	(mm) (in.)	1615x685x2130(63.6x27x83.9)



SU1017