


Ratchet Load Binder

- Reliable design for safety and easy operation.
- High quality drop forged construction.
- Heat treated for extra strength.
- Short reach hooks provide optimum take-up.
- Each binder individually proof tested.
- No requirement for locking of handle unlike lever type load binders.
- **Conforms to CE safety standard.**

i-Lift No.		2317201	2317202	2317203	2317204
Min-Max China Size	(in.)	1/4-5/16	5/16-3/8	3/8-1/2	1/2-5/8
Working Load Limited	(lbs)	2600	5400	9200	11000
Proof Load	(lbs)	5200	10800	18400	26000
Minimum Ultimate Load	(lbs)	7800	19000	33000	46000
Weight	(lbs)	3.52	10.50	12.90	14.38
Handle Length	(in.)	7.16	13.42	13.92	
Dimensions	L1	7.16		13.92	
	L2	0.89		1.30	
	L3	1.77		2.60	
	L4	16.22	22.64	24.13	26.45
	L5	21.26	30.64	32.13	34.45
	L6	17.79	25.24	27.04	30.07
	L7	22.83	33.24	35.04	38.07
	L8	0.35	0.51	0.59	0.74

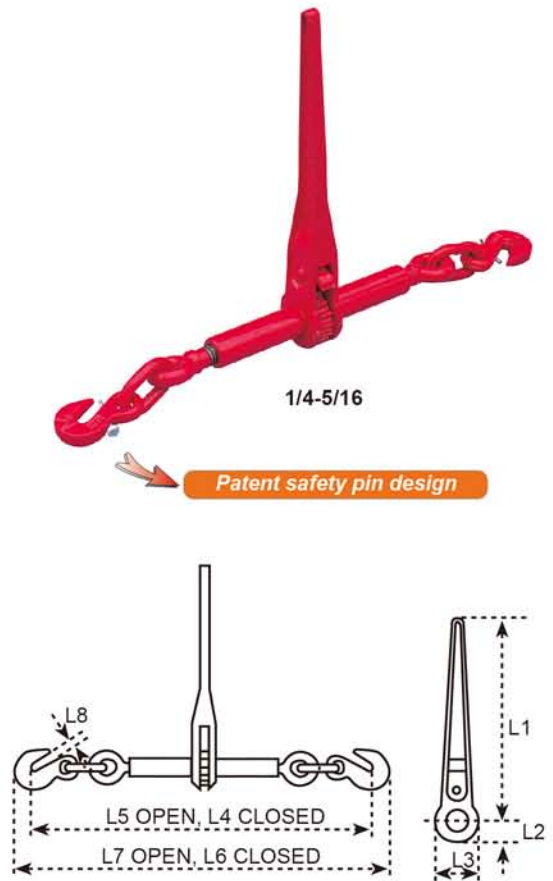

Lever Load Binder

- Safe, reliable design for all heavy duty transport use.
(take up slack and apply tension to a tie down system)
- Drop forged steel, high strength.
- Free 360 degree swivel hooks for easier handling.
- Heat-treated for extra strength.
- Each binder individually proof tested.

i-Lift No.		2317301	2317302	2317303		2317304
Min-Max China Size	(in.)	1/4-5/16	5/16-3/8	3/8-1/2		1/2-5/8
Working Load Limited	(lbs)	2600	5400	9200		11000
Proof Load	(lbs)	5200	10800	18400		22000
Minimum Ultimate Load	(lbs)	7800	19000	28000	33000	44000
Weight	(lbs)	3.52	8.37	12.11	12.20	19.7
Handle Length	(in.)	11.42	15.43	17.24		21.00
Dimensions	h1	18.5	25.2	28.5		33.86
	h2	17.3	23.2	26.38		30.12
	h3	14.17	19.49	22.05		25.78
	h4	11.42	15.55	17.64		20.87
	h5	8.27	11.22	12.99		14.37
	h6	8.07	11.22	12.20		14.37
	h7	0.35	0.51	0.59		0.74

