



Full Electric Stacker FY / FY-AC series

With DC or AC technology

- ▲ Double cylinder are mounted on both sides for wide view while loading and transporting.
- ▲ High-comfort tiller grip reduces fatigue, improving productivity.
- ▲ Heavy-duty design with top quality mast construction.
- ▲ Powerful drive and power unit made in Europe.
- ▲ Top quality electronic control system made in Europe.
- ▲ **Conforms to EN1757-1:2001, EN 1726.**

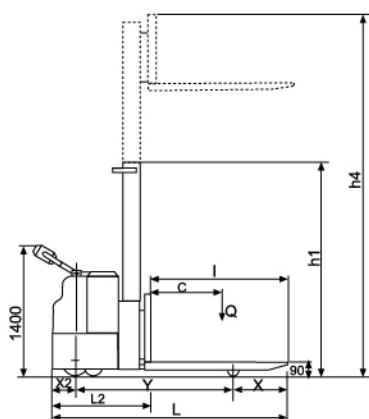

FY1533-AC

i-Lift No.		1551001	1551002	1551003	1551004	1551005	1551006	1551007	1551008
Model		FY1224	FY1524	FY1229	FY1529	FY1231	FY1531	FY1233	FY1533
i-Lift No.		1551009	1551010	1551011	1551012	1551013	1551014	1551015	1551016
Model		FY1224AC	FY1524AC	FY1229AC	FY1529AC	FY1231AC	FY1531AC	FY1233AC	FY1533AC
Capacity	kg(lb.)	1200(2640)	1500(3300)	1200(2640)	1500(3300)	1200(2640)	1500(3300)	1200(2640)	1500(3300)
Max. Fork Height	mm(in.)	2450(96.5)		2900(114.2)		3100(122)		3300(129.9)	
Lowered Fork Height	mm(in.)	90(3.5)							
Load Centre	mm(in.)	600(23.6)							
Fork Length	mm(in.)	1150(45.3)							
Fork Overall Width	M mm(in.)	540(21.3)							
Fork Individual Width	N mm(in.)	160(6.3)							
Motors Traveling	(KW/V)	1.2/24							
Motors Traveling (AC)	(KW/V)	1.2/24 (AC)							
Motors Lifting	(KW/V)	2.2/24							
Travelling Speed With/Without Load (km/h)		4.0/5.5							
Lifting Speed With/Without Load	(km/h)	95/122							
Lowering Speed With/Without Load	(km/h)	110/60							
Front Wheel	mm(in.)	Φ78×70(3x2.7)							
Rear Wheel	mm(in.)	Φ150×75(6x3)							
Driver Wheel	mm(in.)	Φ250×80(10x 3.1)							
Battery (service free)	(Ah/V)	200/24							
Battery Charger	(A/V)	20/24							
Option Traction Battery	(Ah/V)	240/24							
Turning Radius	mm(in.)	1560(61.4)							
Overall Dimension	X mm(in.)	459(18.1)							
	X2 mm(in.)	195(7.7)							
	Y mm(in.)	1319(51.9)							
	L2 mm(in.)	820(32.3)							
	L mm(in.)	1970(77.6)							
	Wa mm(in.)	1575(62)							
	h1 mm(in.)	1800(70.9)		2025(79.7)		2125(83.7)		2225(87.6)	
h4 mm(in.)	3094(121.8)		3544(140)		3744(147.4)		3944(155.3)		
Net Weight	kg(lb.)	730(1606)		758(1667.6)		770(1694)		782(1720.4)	