


Double Mast Aerial Work Platform XP series

- ▲ A revolutionary design of mast provides the most stable and compact mast in the industry.
- ▲ Provides access to overhead fixture and stocked shelves much safer than traditional ladders or scaffolding.
- ▲ Suitable for 1~2 person to work upraised.
- ▲ Maximum platform height: 8m; 10m; 12m.
- ▲ Power supply: Single phase AC as standard. DC or both AC as option.
- ▲ **Conforms to CE, EN280:2001+A2:2009, EN60204-1:2006+A1:2009, ENISO14121-1:2007**

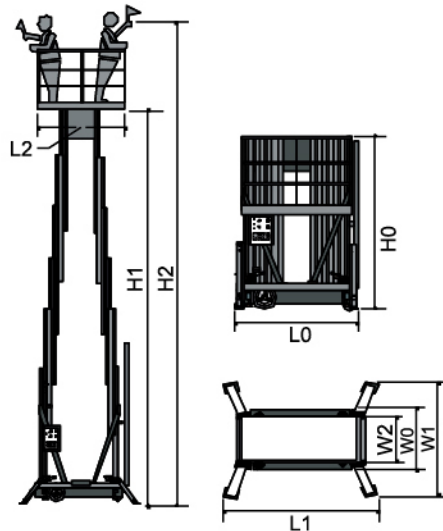

i-Lift No.		2410201	2410202	2410203	2410204
Model		XP2008	XP2010	XP2012A	XP2012B
Max. Platform Height	H1 (mm)(in.)	8000(315)	10000(400)	12000(472)	
Max. Working Height	H2 (mm)(in.)	9700(381.9)	11700(460)	13700(539.4)	
Loading Capacity	kg(lb.)	300(660)		250(550)	160(352)
Platform Size	L2xW2 (mm)(in.)	1200x600(47.2x23.6)		1330x600(52.3x23.6)	
Outrigger Footprint	L1xW1 (mm)(in.)	2020x2000(800x800)	2340x2220(92x87.4)	2560x2460(100x96.8)	
Voltage (V/Hz)		AC220/50			
Power Pack	Lifting (KW)	0.75		1.5	
	Self-propeller (KW)	N/A			
Stored Dimensions	L0xW0xH0 (mm)(in.)	1390x880x1860(54x34x96)	1390x880x2060(54x34x80)	1590x1020x2440(62x40x96)	1590x1020x2180(62x40x85.8)
Net Weight	kg(lb.)	610(1342)	680(1496)	810(1782)	840(1848)